

# Nextivity CEL-FI GO G51 Stationary Repeater

SKU: RPR-CF-00716

MPN: G51-LE-003

## Description

Following the technological evolution of the Cel-Fi G41, the G51 is next in the series, providing all the brilliance of the G41 with the addition of mid-band 5G. G51 automatically scans and boosts the entire channel width of 5G 3500 MHz, which is the major global 5G band known as n78, along with boosting a 4G band to provide long range connectivity.

G51 is essential for any tech professional, enterprise, or industrial environment looking to leverage the low latency and ultra-fast data performance that 5G brings. Unlike complicated "Private 5G" networks or DAS which can take 6-12 months to implement, G51 can be installed in as little as a few hours. The unit identifies and locks on to the network operator's 5G network, and can be connected to one or many antennas distributed throughout the building to provide seamless, strong voice and data connectivity.

Cel-Fi G51 is a very straight forward device, it has a single input RF connector which connects to a roof-mounted (donor) antenna, and a single output RF connector which connects to an indoor (service) antenna. Powertec provide a range of 5G-compatible antennas that have been laboratory verified for best performance on n78 5G.

The output power of G51 is +20 dBm for most bands. It's important to be mindful that while the stated output power for n78 is +27 dBm, the larger 100 MHz channel width (up to 5x



### Nextivity

Nextivity, Inc. develops and sells in-building cellular coverage technology products and solutions. The Company helps wireless subscribers and increases radio frequency network capacity for mobile network operators. Nextivity operates in the State of California.

Nextivity is best known for its Cel-Fi range of mobile repeater solutions which provide low cost improved in-building coverage solutions.

## RF Specification

Simultaneous Bands:	2	Relay Bandwidth:	120 MHz
Downlink Max. Gain:	100 dB	Uplink Max. Gain:	100 dB
Supported Technologies:	4G LTE, 5G NR		

Supported Bands

Frequency Band	Duplex Method	MIMO	Downlink Output Power	Uplink Output Power	Max. Channel Width	Downlink Start Frequency	Downlink Stop Frequency	Uplink Start Frequency	Uplink Stop Frequency
B1 (2100 MHz)	FDD	1x1 SISO	20 dBm	22 dBm	20 MHz	2110 MHz	2170 MHz	1920 MHz	1980 MHz
B3 (1800 MHz)	FDD	1x1 SISO	20 dBm	22 dBm	20 MHz	1805 MHz	1880 MHz	1710 MHz	1785 MHz
B5 (850 MHz)	FDD	1x1 SISO	20 dBm	20 dBm	20 MHz	869 MHz	894 MHz	824 MHz	849 MHz
B7 (2600 MHz)	FDD	1x1 SISO	20 dBm	22 dBm	20 MHz	2620 MHz	2690 MHz	2500 MHz	2570 MHz
B8 (900 MHz)	FDD	1x1 SISO	20 dBm	20 dBm	15 MHz	925 MHz	960 MHz	880 MHz	915 MHz
B20 (800 MHz)	FDD	1x1 SISO	20 dBm	20 dBm	20 MHz	791 MHz	821 MHz	832 MHz	862 MHz
B28 (700 MHz)	FDD	1x1 SISO	20 dBm	20 dBm	20 MHz	758 MHz	788 MHz	703 MHz	733 MHz
n78 (3500 MHz)	TDD	1x1 SISO	27 dBm	24 dBm	100 MHz	3300 MHz	3800 MHz	3300 MHz	3800 MHz

RF Connections

RF Connector Function	Quantity	RF Interface	Notes
Donor Input	1	SMA Female	
Service Output	1	SMA Female	

Network Interfaces

Wireless Interfaces

## Bluetooth Interface

Protocol:	Bluetooth 4.2	Power Class:	Class 3
-----------	---------------	--------------	---------

Ethernet Interfaces

Interface	Quantity	Function	Signalling
RJ45 Copper	1	Management	100BASE-T

# Physical Specification

Ingress Protection:	IPX0	Min. Operating Temperature:	0 °C
Mounting:	Screw / Bolt	Max. Operating Temperature:	40 °C
Dimensions:	265.2 × 172 × 69.2 mm	Weight:	2.2 kg
Compliance/Certifications:	CE		
	'		
R-NZ			
'			
RCM			
'			
RoHS			


## Device Power Specifications

Max. Consumption:	60 W
-------------------	------

## Power Interface

Power Connector	Min. Input Voltage	Max. Input Voltage	Voltage Type	Input Current
DC Coaxial, Type A, Female 5.5 x 2.5 mm	9 V	13 V	DC	2.5 A

# Drawing

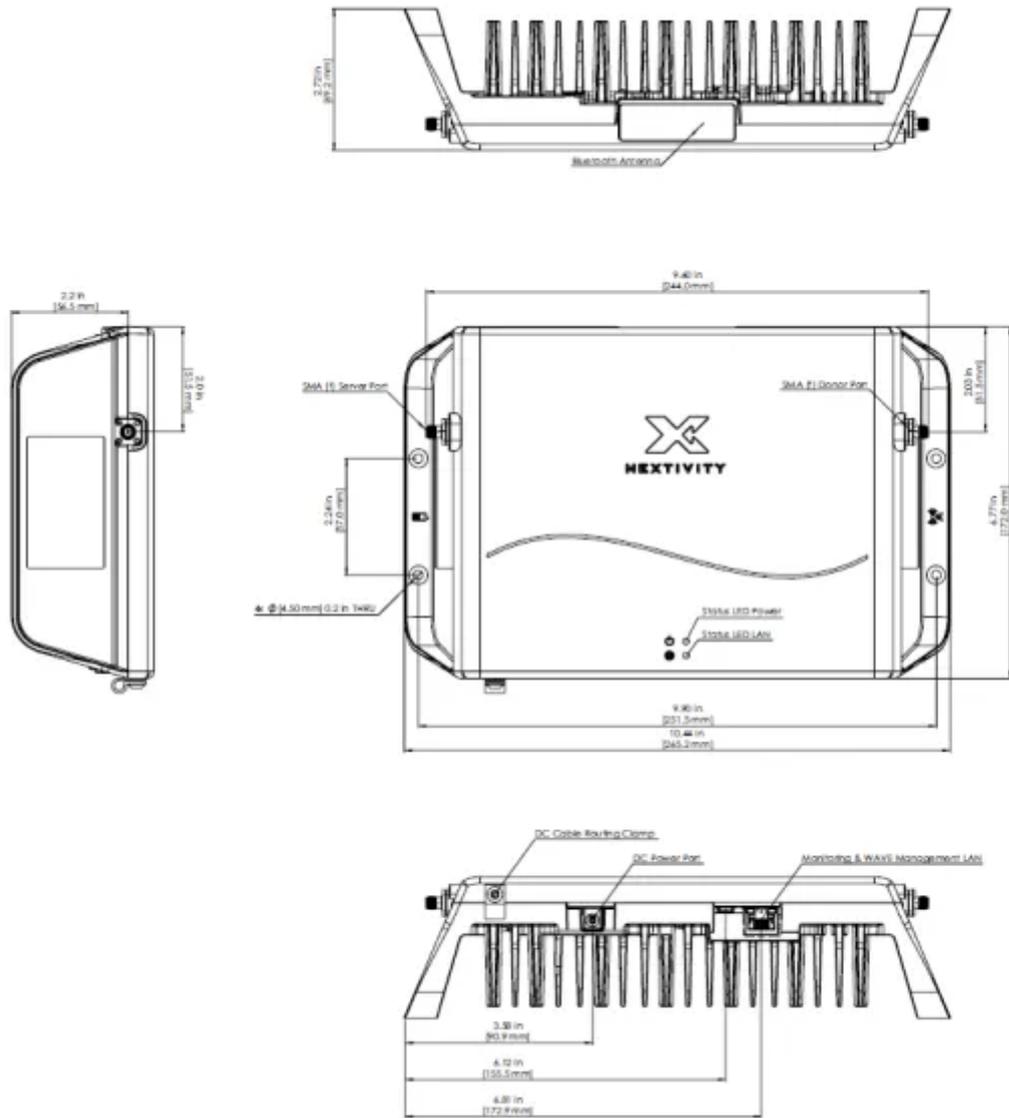

(Dimensions = inches [mm])

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

