

# 2J Phoenix 4G-5G WiFi Ultraband 2x2 MIMO + GNSS 3-Port Combo Stud Antenna, 617 to 5925 MHz

SKU: ANT-2J-00018  
MPN: 2J6984BGFA

## Description

The 2J Phoenix 4G-5G WiFi Ultraband 2x2 MIMO + GNSS 3-Port Combo Stud Antenna (SKU: ANT-2J-00018, Part Number: 2J6984BGFA) is a high-performance, multi-functional antenna designed for versatile applications across automotive, marine, telematics, automation, and M2M markets. Its rugged ASA plastic construction and IP67 certification ensure durability in harsh environments, with an operating temperature range from -40 °C to 85 °C.

The antenna features three RF connections for enhanced connectivity: two 5G NR ports supporting frequencies from 617 to 5925 MHz, offering reliable linear polarisation and a 50 Ω impedance. Each port includes an SMA Male connector on a 3 metre L-100 cable. The integrated GNSS functionality operates within 1575 to 1602 MHz, featuring a right-hand circular polarisation and an active LNA with a 28 dBic gain, ensuring precise positioning data.

2J's commitment to quality and innovation is reflected in the Phoenix...

[Read More](#)



## RF Specification

2J

Cable 1: 5G NR

2J is a worldwide supplier of antenna solutions for Automotive, Marine, Telematic, Automation and M2M markets. 2J utilise a plethora of modern engineering tools, from network analysers and anechoic chambers, to simulation software and 3D printers. These tools help reduce design phases, and enable us to react to customers' needs promptly and efficiently.

Over the past decade, 2J has established ...

Start Frequency:	617 MHz	Polarisation:	Linear
Stop Frequency:	5925 MHz	Input Impedance:	50
Max. Input Power:	25 W		

#### RF Connectors

Ports	RF Interface	Body Shape	Cable Series	Length
1	SMA Male	Straight	L-100	3000 mm

#### Frequency Test Data

Start Freq.	Stop Freq.	Peak Gain	Return Loss	VSWR	Avg. Gain	Efficiency
617 MHz	960 MHz	2.1 dBi	> 11.2 dB	< 2:1	-3.5 dBi	46%
1427 MHz	2690 MHz	5 dBi	> 8.3 dB	< 2.6:1	-3.1 dBi	51%
3300 MHz	5000 MHz	3.8 dBi	> 7.1 dB	< 3.2:1	-5.1 dBi	33%
5150 MHz	5925 MHz	3.9 dBi	> 7.4 dB	< 2.6:1	-5.2 dBi	31%

## Cable 2: 5GNR

Start Frequency:	617 MHz	Polarisation:	Linear
Stop Frequency:	5925 MHz	Input Impedance:	50
Max. Input Power:	25 W		

#### RF Connectors

Ports	RF Interface	Body Shape	Cable Series	Length
1	SMA Male	Straight	L-100	3000 mm

#### Frequency Test Data

Start Freq.	Stop Freq.	Peak Gain	Return Loss	VSWR	Avg. Gain	Efficiency
617 MHz	960 MHz	3.2 dBi	> 9.6 dB	< 2.1:1	-3.7 dBi	45%
1427 MHz	2690 MHz	5 dBi	> 8.2 dB	< 2.6:1	-3 dBi	52%
3300 MHz	5000 MHz	5.1 dBi	> 6.9 dB	< 3.3:1	-4.3 dBi	40%
5150 MHz	5925 MHz	4.7 dBi	> 7 dB	< 2.8:1	-4.9 dBi	34%

## Cable 3: GNSS

Start Frequency:	1575.42 MHz	Input Impedance:	50
Stop Frequency:	1602 MHz	Polarisation:	Right Hand Circular (RHCP)

## Low Noise Amplifier (LNA)

LNA Gain:	28 dBic	Min. Operating Voltage:	1.5 V
-----------	---------	-------------------------	-------

Noise Figure:	≤ 1.5 dB	Max. Operating Voltage:	3.6 V
---------------	----------	-------------------------	-------

Power Consumption:	< 24.3 mW
--------------------	-----------


RF Connectors

Ports	RF Interface	Body Shape	Cable Series	Length
1	SMA Male	Straight	L-100	3000 mm


# Physical Specification

Subtype:	Fin / Stud / Combo	Dimensions:	80 x 74 x 25.6
Input Ports:	3	Ingress Protection:	IP67
MIMO:	2x2 MIMO	Materials:	ASA Plastic
Min. Operating Temperature:	-40 °C	Compliance/Certifications:	RoHS
Max. Operating Temperature:	85 °C		

# Drawing

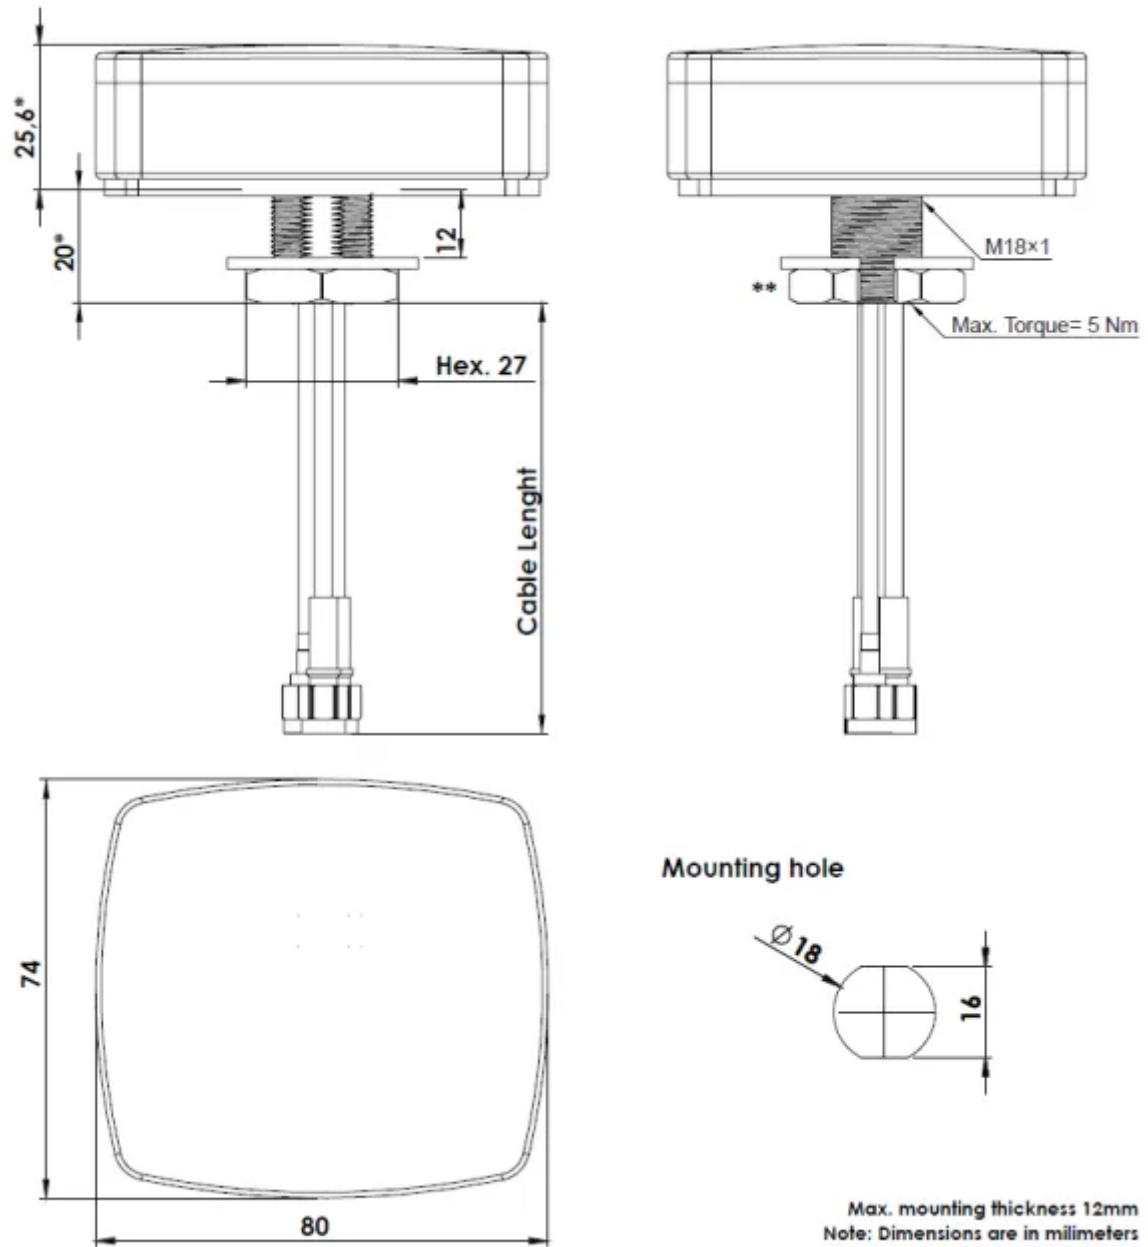

## Mounting hole



Max. mounting thickness 12mm  
Note: Dimensions are in millimeters  
\*Dimensions are after mounting  
\*\*Max. Torque= 5 Nm

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

