

# Nextivity Cel-Fi GO G31-3/5/28L Repeater

SKU: RPR-CF-00065

MPN: G31-3/5/28 EXA

## Description

The Cel-Fi GO is an extremely effective repeater designed to improve mobile phone and data coverage. This model has been designed to improve Telstra 3G and 4G services in a matter of minutes.

Setting up the repeater to improve indoor mobile coverage is simple. The unit has an input connection and an output connection which are set up as follows:

- Input connection: connected to roof mounted antenna by cable
- Output connection: can either connect directly to an antenna, or can use one or more cables to distribute signal elsewhere.



[Read More](#)

The Cel-Fi GO works by decoding and amplifying weak signal detected by the roof mounted antenna. This cleaner signal is then rebroadcast at full "five bar" strength by the antenna connected to the output port.

Mobile services can be distributed throughout a large home or building by using a series of antennas, creating localised hotspots of 3G or 4G service. This type of system is known as a Distributed Antenna System (DAS) and needs to be carefully designed to ensure proper functioning.

The Telstra Cel-Fi GO can operate on one frequency band at a



## Nextivity

Nextivity, Inc. develops and sells in-building cellular coverage technology products and solutions. The Company helps wireless subscribers and increases radio frequency network capacity for mobile network operators. Nextivity operates in the State of California.

Nextivity is best known for its Cel-Fi range of mobile repeater solutions which provide low cost improved in-building coverage solutions.

# RF Specification

Simultaneous Bands:	1	Relay Bandwidth:	20 MHz
Downlink Max. Gain:	100 dB	Uplink Max. Gain:	100 dB
Supported Technologies:	3G UMTS, 4G LTE		

## Supported Bands

Frequency Band	Duplex Method	MIMO	Downlink Output Power	Uplink Output Power	Max. Channel Width	Downlink Start Frequency	Downlink Stop Frequency	Uplink Start Frequency	Uplink Stop Frequency
B3 (1800 MHz)	FDD	1x1 SISO	16 dBm	22 dBm	20 MHz	1805 MHz	1880 MHz	1710 MHz	1785 MHz
B5 (850 MHz)	FDD	1x1 SISO	15 dBm	20 dBm	15 MHz	869 MHz	894 MHz	824 MHz	849 MHz
B28 (700 MHz)	FDD	1x1 SISO	16 dBm	20 dBm	20 MHz	758 MHz	788 MHz	703 MHz	733 MHz

## RF Connections

RF Connector Function	Quantity	RF Interface	Notes
Donor Input	1	SMA Female	
Service Output	1	SMA Female	

# Network Interfaces

# Wireless Interfaces

## Bluetooth Interface

Protocol:	Bluetooth 4.2	Power Class:	Class 3
-----------	---------------	--------------	---------

# Ethernet Interfaces

# Physical Specification

Ingress Protection:	IP54	Min. Operating Temperature:	0 °C
Mounting:	Screw / Bolt	Max. Operating Temperature:	65 °C
Dimensions:	255 × 87 × 28 mm	Weight:	0.6 kg
Compliance/Certifications:	CE		
R-NZ			
RCM			
RoHS			


## Device Power Specifications

Max. Consumption:	15 W
-------------------	------

## Power Interface

Power Connector	Min. Input Voltage	Max. Input Voltage	Voltage Type
DC Coaxial, Type A, Female 5.5 x 2.5 mm	9.6 V	28.8 V	DC

Drawing

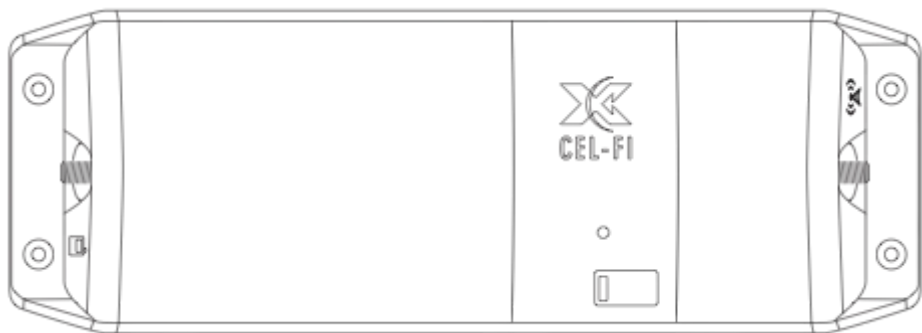

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

