Powertec Wireless Technology
ABN: 42 082 948 463
PO Box 1034, Ashmore City
Queensland, Australia, 4214
sales@powertec.com.au
1300 769 378

Nextivity Cel-Fi GO G32-1/3/5/7/8/20X Repeater

SKU
RPR-CF-00392
MPN
G32-1/3/5/7/8/20X

Description

The Cel-Fi GO G32 is a highly effective repeater designed to improve Optus mobile voice, text, and data coverage. This model has been designed to improve both Optus 3G and 4G services in a matter of minutes.

Setting up the repeater to improve indoor mobile coverage is simple. The unit has an input connection and an output connection which are set up as follows:

- Input connection: connected to roof mounted antenna by cable
- Output connection: can either connect directly to an antenna, or can use one or more cables to distribute signal elsewhere.

Read More

The Cel-Fi GO G32 works by decoding and amplifying weak Optus signal detected by the roof mounted antenna. This signal is then boosted up to 100 dB using a linear amplifier and output through the antenna or series of antennas connected to the output port.

Unique to the GO G32, the repeater is IP66 ingress protection rated and built tough for use in outdoor and tough environments.

The Optus Cel-Fi GO G32 can operate on two frequency bands simultaneously, providing either 3G and 4G coverage, or 2C 4G LTE-Advanced for higher data speeds.

Read More



Nextivity

Nextivity, Inc. develops and sells in-building cellular coverage technology products and solutions. The Company helps wireless subscribers and increases radio frequency network capacity for mobile network operators. Nextivity operates in the State of California.

Nextivity is best known for its Cel-Fi range of mobile repeater solutions which provide low cost improved in-building coverage solutions.

RF Specification

Simultaneous Bands
2
Downlink Max. Gain
100 dB
Supported Technologies
3G UMTS, 4G LTE
Relay Bandwidth
40 MHz
Uplink Max. Gain
100 dB
Supported Bands

Frequency Band	Duplex Method	MIMO	Max. Channel Width	Downlink Start Frequency	Downlink Stop Frequency	Uplink Start Frequency	Uplink Stop Frequency
B1 (2100 MHz)	FDD	1x1 SISO	20 MHz	2110 MHz	2170 MHz	1920 MHz	1980 MHz
B3 (1800 MHz)	FDD	1x1 SISO	20 MHz	1930 MHz	1990 MHz	1850 MHz	1910 MHz
B5 (850 MHz)	FDD	1x1 SISO	15 MHz	869 MHz	894 MHz	824 MHz	849 MHz
B7 (2600 MHz)	FDD	1x1 SISO	20 MHz	2620 MHz	2690 MHz	2500 MHz	2570 MHz
B8 (900 MHz)	FDD	1x1 SISO	15 MHz	925 MHz	960 MHz	880 MHz	915 MHz
B20 (800 MHz)	TDD	1x1 SISO	20 MHz	791 MHz	821 MHz	832 MHz	862 MHz

RF Connections

RF Connector Function	Quantity	RF Interface	Notes
Donor Input	1	SMA Female	
Service Output	1	SMA Female	

Network Interfaces
Wireless Interfaces
Bluetooth Interface
Protocol
Bluetooth 4.2
Power Class

Class 3

Physical Specification

Ingress Protection

IP66

Mounting

Screw / Bolt

Dimensions

272.5 × 96.5 × 43.5 mm

Compliance/Certifications

CE

,

R-NZ

,

RCM

,

RoHS

Min. Operating Temperature

0 °C

Max. Operating Temperature

65 °C

Weight

0.85 kg

Device Power Specifications


Max. Consumption

16 W

Power Interface

Power Connector	Min. Input Voltage	Max. Input Voltage	Voltage Type	Input Current
DC Coaxial, Type A, Female 5.5 x 2.5 mm	9.6 V	16.5 V	DC	2 A

Drawing

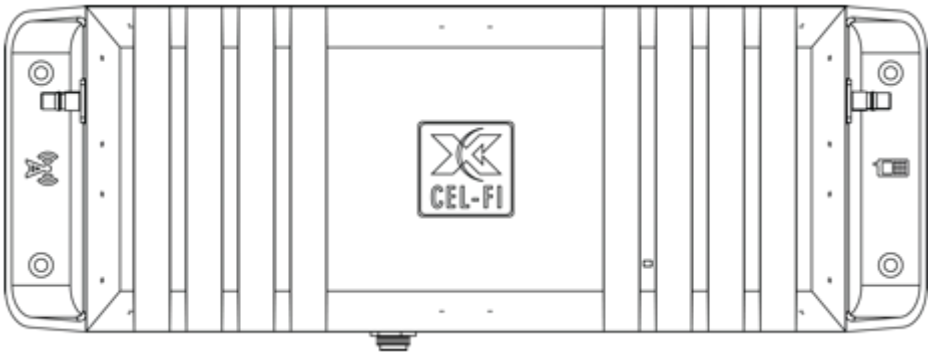

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

