

Page



Powertec Wireless Technology
ABN: 42 082 948 463
PO Box 1034, Ashmore City
Queensland, Australia, 4214
sales@powertec.com.au
1300 769 378

Nextivity Cel-Fi GO G41-JE Cellular 4G-5G Stationary Repeater

SKU
RPR-CF-00695
MPN
G41-JE
Barcode
812037032790

Description

Designed to solve cellular coverage issues for indoor environments, the Cel-Fi GO G41 Smart Signal Booster is the most powerful carrier-grade solution available. Providing up to 100 dB gain, GO G41 delivers class-leading 3G/4G/5G voice and data performance. GO G41 also supports 5GNR operation for seamless network migration and consistent connectivity. In addition to providing cellular coverage up to 3,000 m² (1,500 m² in U.K.) when configured with the included donor and server antennas, the system can be expanded with outdoor or additional server antennas for an increased coverage footprint. Plus, GO G41 is network safe and offers class-leading ease of installation.





Nextivity

Nextivity, Inc. develops and sells in-building cellular coverage technology products and solutions. The Company helps wireless subscribers and increases radio frequency network capacity for mobile network operators. Nextivity operates in the State of California.

Nextivity is best known for its Cel-Fi range of mobile repeater solutions which provide low cost improved in-building coverage solutions.

RF Specification

Simultaneous Bands

2

Downlink Max. Gain

100 dB

Supported Technologies

[3G UMTS](#), [4G LTE](#), [5G NR](#)

Relay Bandwidth

40 MHz

Uplink Max. Gain

100 dB

Noise Figure

≤ 7 dB

Group Delay

≤ 5.50 μ s

Supported Bands

Frequency Band	Duplex Method	MIMO	Downlink Output Power	Uplink Output Power	Max. Channel Width	Downlink Start Frequency	Downlink Stop Frequency	Uplink Start Frequency
----------------	---------------	------	-----------------------	---------------------	--------------------	--------------------------	-------------------------	------------------------

B1 (2100 MHz)	FDD	1x1 SISO	20 dBm	22 dBm	20 MHz	2110 MHz	2170 MHz	1920 MHz
B3 (1800 MHz)	FDD	1x1 SISO	20 dBm	22 dBm	20 MHz	1805 MHz	1880 MHz	1710 MHz
B5 (850 MHz)	FDD	1x1 SISO	20 dBm	20 dBm	15 MHz	869 MHz	894 MHz	824 MHz
B7 (2600 MHz)	FDD	1x1 SISO	20 dBm	22 dBm	20 MHz	2620 MHz	2690 MHz	2500 MHz
B8 (900 MHz)	FDD	1x1 SISO	20 dBm	20 dBm	15 MHz	925 MHz	960 MHz	880 MHz
B28 (700 MHz)	FDD	1x1 SISO	20 dBm	20 dBm	20 MHz	758 MHz	788 MHz	703 MHz
B40 (2300 MHz)	TDD	1x1 SISO	20 dBm	22 dBm	20 MHz	2300 MHz	2390 MHz	2300 MHz

RF Connections

RF Connector Function Quantity RF Interface Notes

Donor Input	1	SMA Female	
Service Output	1	SMA Female	

Network Interfaces

Wireless Interfaces

Bluetooth Interface

Protocol

[Bluetooth 4.2](#)

Power Class

[Class 3](#)

Ethernet Interfaces

Interface	Quantity	Function	Signalling
RJ45 Copper	1	Management	100BASE-T

Physical Specification

Ingress Protection

[IP20](#)

Mounting

Screw / Bolt

Dimensions


260 × 107 × 63 mm
Compliance/Certifications
[CE](#)

,
[R-NZ](#)
,
[RCM](#)

,
[RoHS](#)
Min. Operating Temperature
0 °C
Max. Operating Temperature
40 °C
Weight
2 kg
Device Power Specifications
Max. Consumption
40 W

Power Interface

Power Connector	Min. Input Voltage	Max. Input Voltage	Voltage Type
DC Coaxial, Type A, Female 5.5 x 2.5 mm Drawing	9 V	13 V	DC

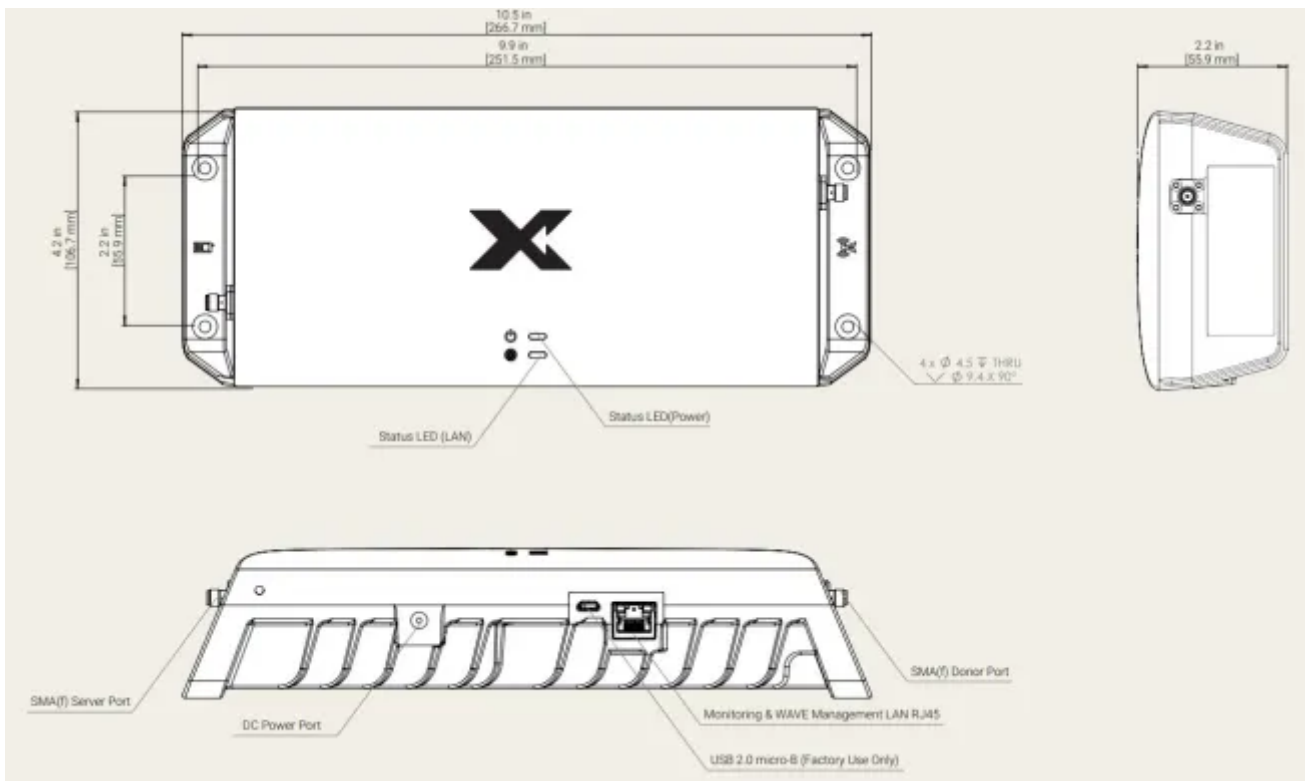

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

