

# N Female Four-Hole Flange Connector with Round Post

SKU: N2-4F-RP

MPN: N2-RP-4F

## Description

N (or N-Type) flange connectors are used within high performance low-band radio communications systems, such as in aerospace, radar, 4G cellular, and broadcast.

This N female connector is used to terminate coaxial cable types onto a panel where both the inner conductor and outer braid are soldered accordingly. The female connector body has a flange design with four mounting holes.

As a low-PIM design the connector uses ternary alloys to achieve very low VSWR under 3 GHz, and a modest < 1.3:1 VSWR up to 6 GHz.

This N Female coaxial connector is used in high performance and general-precision systems up to 6 GHz. Termination of flange connectors particularly those operating towards the upper frequency limit must be made with great care and precision.

[Read More](#)



# RF Connector Interface

RF Interface	Body Shape	Mounting
N Female	Straight	4-Hole Flange

## RF Specification

Start Frequency:	0 GHz	Input Impedance:	50
Stop Frequency:	4 GHz	Inner Contact Resistance:	$\leq 1 \text{ m}\Omega$
		Insulation Resistance:	$\geq 5000 \text{ m}\Omega$
		Outer Contact Resistance:	$\leq 1 \text{ m}\Omega$
		RF Operating Voltage:	$\leq 500 \text{ Vrms}$


## VSWR Measurement

Frequency	VSWR	Return Loss
4000 MHz	$\leq 1.3:1$	$\leq 0.15 \text{ dB}$

## Physical Specification

Body Material:	Brass	Conductor Attachment:	Round Post
Body Plating:	Nickel	Contact Material:	Beryllium Copper
Insulator Material:	PTFE / Teflon	Contact Plating:	White Bronze
Dimensions:	$18.4 \times 25.4 \times 25.4$	Min. Operating Temperature:	-40 °C
Weight:	25 g	Max. Operating Temperature:	85 °C
Compliance/Certifications:	ISO 9001 Quality Management	Mating Cycles:	> 500
RoHS			

# Drawing

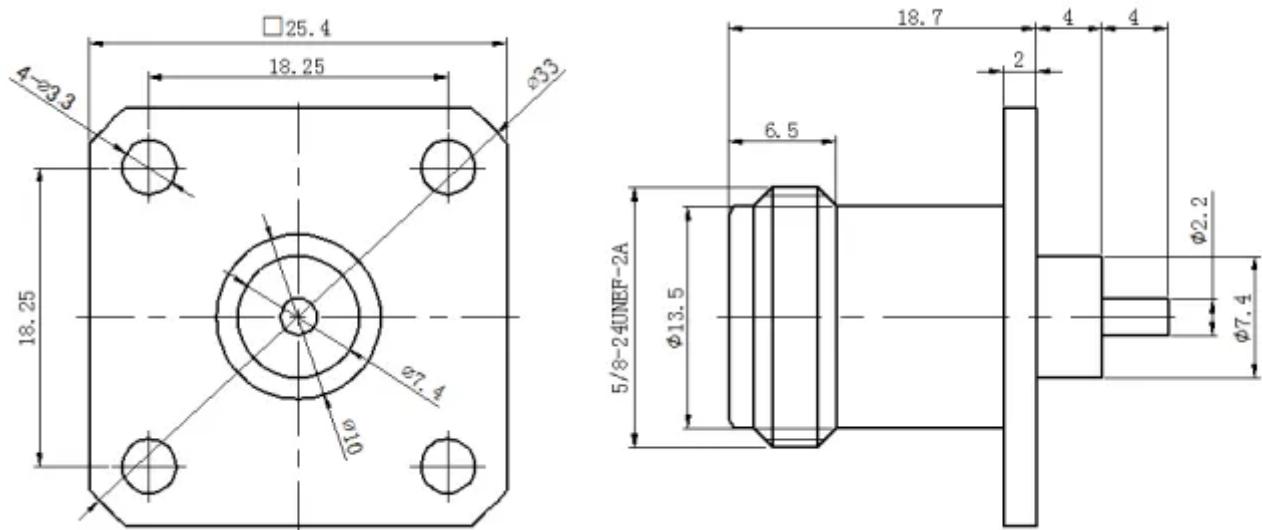

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

