

1.37 mm Cable Assembly, U.FL to SMA Female Bulkhead, 14cm

SKU: ACC-PT-00328

MPN: CA137-UFLSA2BRM.014

Barcode: 9337692003592


Description

1.37 mm Mini-Coax cable assemblies are used inside electronics to interface a surface mount RF connector located on a PCB to an externally mounted connector typically mounted on the side of the device.

This cable assembly is used to provide an external SMA Female connector from a device with a U.FL connector mounted on its PCB. Typically this is to allow the connection of an external antenna or attachment of an antenna feeder cable that uses an SMA Male connector.

The U.FL interface uses an IPEX MHF series connector, suitable for any Hirose U.FL, LTI IPX, Amphenol AMC, or Tyco UMCC interface.

[Read More](#)

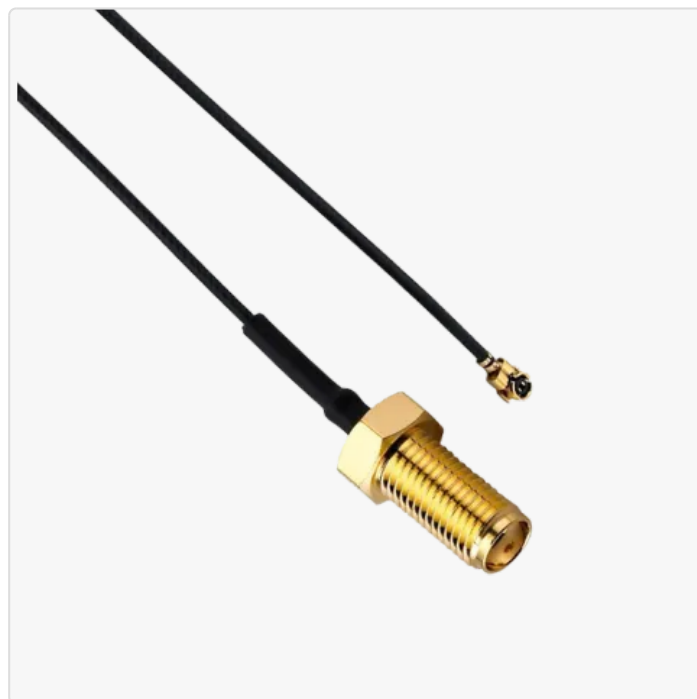

RF Specification

Start Frequency:	0 GHz	Stop Frequency:	3 GHz
------------------	-------	-----------------	-------

VSWR Measurement	
Frequency	VSWR
3000 MHz	≤ 1.3:1

Physical Specification

Subtype:	Patch Cable	Length:	0.18 m
Mating Cycles:	> 50		
Compliance/Certifications:	ISO 9001 Quality Management		
RoHS			

RF Connectors

RF Interface

- U.FL Female
- SMA Female


Body Shape

- Right Angle
- Straight

Mounting

- Free Hanging
- Bulkhead

Drawing

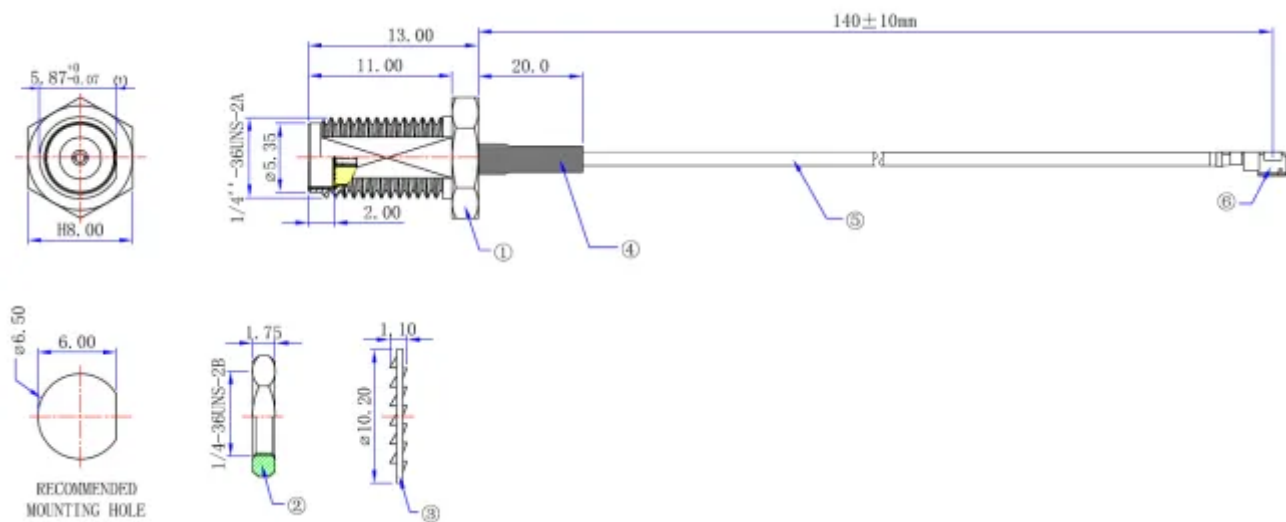

1.37 mm Mini-Coax

Min. Frequency:	0 GHz	Max. Frequency:	6 GHz
Impedance:	50	Colour:	Black
Min. Bend Radius Static:	4 mm		
Attenuation @ 1 GHz:	1.6 dB/m		

Cable Layers

Layer	Diameter	Materials	Notes
Inner Conductor		Silver Plated Copper (SC)	7x0.102 mm Strand
Dielectric	0.88 mm	Fluorinated Ethylene Propylene (FEP)	
Outer Conductor	1.10 mm	Silver Plated Copper Braid	
Outer Jacket	1.37 mm	Fluorinated Ethylene Propylene (FEP)	

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

