Powertec Wireless Technology
ABN: 42 082 948 463
PO Box 1034, Ashmore City
Queensland, Australia, 4214
sales@powertec.com.au
1300 769 378

Taoglas MA9909 Guardian 8x8 MIMO + GNSS Adhesive Antenna

SKU
ANT-TG-00001
MPN
MA9909.A.002

Description

The Taoglas GuardianX MA9909 is a low profile heavy duty, fully IP67 rated waterproof, adhesive external combination antenna. It combines 9 antenna elements into one enclosure, 1 GPS/GLONASS/Galileo, eight 4G-5G MIMO (600 to 6000 MHz). The Taoglas GuardianX has been designed as a low profile solution for several IoT and Automotive applications where space is at a premium.

This unique product delivers powerful worldwide 5G FR1 MIMO antenna technology up to 8x8 along with GNSS for GPS applications. This is an ideal external combination antenna solution that is used where drilling a hole through the roof of a vehicle or a metal panel for an external antenna is not feasible. The GuardianX can operate at band 71 a newly established 5G band at 600 MHz.

Taoglas takes care to have high isolation between the eight MIMO antennas to prevent self-interference. Low loss 6 GHz rated cables are used to keep efficiency high over long cable lengths.


Read More

The Taoglas MA9909 Guardian 8x8 MIMO + GNSS Adhesive Antenna is a robust, low-profile solution designed for IoT and automotive applications where space is limited. It combines nine antenna elements into a single, fully waterproof IP67-rated enclosure, providing comprehensive connectivity with one GPS/GLONASS/Galileo and eight 4G-5G MIMO (600 to 6000 MHz) elements. This makes it ideal for environments where drilling through surfaces for antenna installation is not an option.

The antenna supports the new 5G band at 600 MHz, ensuring optimal performance across a wide frequency range. High isolation between the MIMO elements prevents self-interference, while low-loss 6 GHz rated cables maintain efficiency over extended lengths, making it a reliable choice for high-demand applications.

Constructed from durable polycarbonate, the GuardianX measures 360 x 160 x 16.5 mm and weighs 1.06 kg. It operates efficiently in temperatures ranging from -40...

Read More

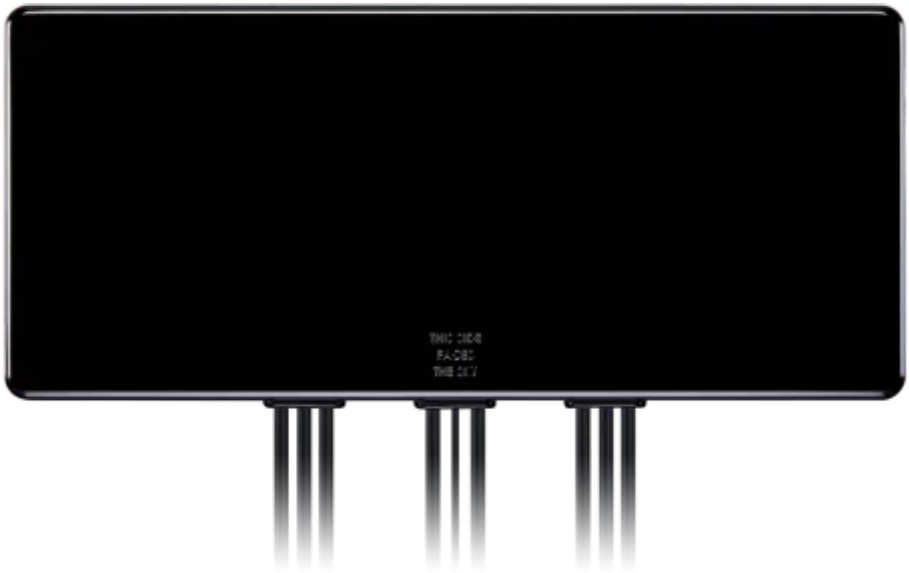

Taoglas

Taoglas provides a comprehensive range of external, embedded and base station antenna solutions for M2M applications such as Telematics / Automotive, Smart-Grid, Metering / Telemetry, Home Automation, Remote Monitoring and Medical applications.

Taoglas' cross-cultural business-solutions approach means research, design, production and customer support services are based at our world-class technology ...

RF Specification

4G-5G 8x8 MIMO

Start Frequency
617 MHz
Stop Frequency
6000 MHz
Max. Input Power
2 W
Polarisation
Linear
Input Impedance
50 Ω
RF Connectors

Ports	RF Interface	Body Shape	Cable Series	Length
8	SMA Male	Straight	L-200	1000 mm

Frequency Test Data

Start Freq.	Stop Freq.	Peak Gain	VSWR	Avg. Gain	Efficiency	Inter-Port Iso.
617 MHz	698 MHz	-0.3 dBi	< 3.5:1	-4.54 dBi	35%	> 8 dB
698 MHz	824 MHz	0.4 dBi	< 3.5:1	-3.76 dBi	42%	> 8 dB
824 MHz	960 MHz	1.4 dBi	< 4:1	-3.55 dBi	44%	> 10 dB
1427 MHz	1518 MHz	-3.1 dBi	< 3.5:1	-7.25 dBi	19%	> 20 dB
1710 MHz	1880 MHz	2.6 dBi	< 3.5:1	-2.77 dBi	53%	> 12 dB
1850 MHz	1990 MHz	2 dBi	< 3.5:1	-3.18 dBi	48%	> 12 dB
1920 MHz	2170 MHz	1.5 dBi	< 3.5:1	-3.21 dBi	48%	> 12 dB
2300 MHz	2690 MHz	1.3 dBi	< 2.5:1	-3.66 dBi	43%	> 15 dB
3300 MHz	3500 MHz	-5.7 dBi	< 4:1	-9.76 dBi	11%	> 20 dB
5150 MHz	5925 MHz	-1.9 dBi	< 4:1	-8.12 dBi	16%	> 30 dB

GNSS Antenna

Gain (Zenith)
1.5 dBic
Start Frequency
1575.42 MHz
Stop Frequency
1602 MHz
Input Impedance
50 Ω
Polarisation
Right Hand Circular (RHCP)

Low Noise Amplifier (LNA)

LNA Gain
30 dBic
Noise Figure
≤ 3.3 dB
Power Consumption
< 10 mW
Min. Operating Voltage
1.8 V
Max. Operating Voltage
5.5 V
RF Connectors

Ports	RF Interface	Body Shape	Cable Series	Length
1	SMA Male	Straight	RG-174	1000 mm

Physical Specification

Subtype
Fin / Stud / Combo
Input Ports
9
MIMO
8x8 MIMO
Min. Operating Temperature
-40 °C

Max. Operating Temperature
85 °C
Dimensions
360 x 160 x 16.5
Ingress Protection
IP67
Materials
Polycarbonate (PC)
Mounting
Adhesive
Weight
1.06 kg

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

