POWERTEC | DATASHEET | UNCONTROLLED WHEN PRINTED PUBLIC | August 1, 2025 04:53

Page



Powertec Wireless Technology ABN: 42 082 948 463 PO Box 1034, Ashmore City Queensland, Australia, 4214 sales@powertec.com.au 1300 769 378

Mast Rotator for APAC Winch-Up Masts

MPN AP-TM-RH360


Description

This is a subcomponent used as part of Winch-Up Masts to provide equipment alignment. It is not ordinarly available separately, but can be custom ordered in.

The rotator is powered by DC and capable of performing a full 360 degree rotation, with the direction controlled by switching polarity. The standard rotator does not implement a slip-ring for continual rotation, as equipment is typically mounted to a choice of headframes that are bolted on top of the rotator.

The rotator implements a 6-Bolt Rotator Bolt-Pattern attachment interface.

Customised rotators are available on request.

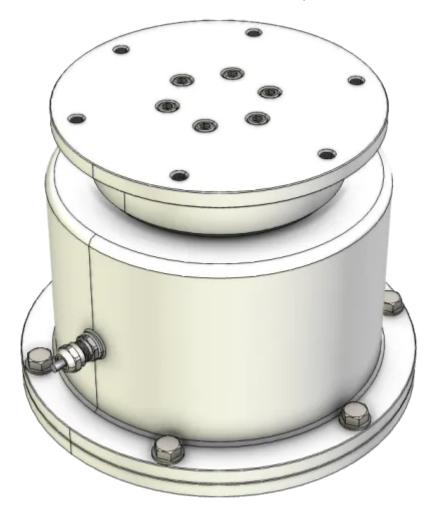

Physical Specification

Installation Retractable Mast Bolt Pattern Dimensions $225 \times 225 \times 120 \text{ mm}$

Installation Interface

1 Rotator Bolt Pattern 6-Bolt Rotator Bolt Pattern

Available Interfaces

Quantity Mounting

1 Rotator Bolt Pattern

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

