

Page



Powertec Wireless Technology
ABN: 42 082 948 463
PO Box 1034, Ashmore City
Queensland, Australia, 4214
sales@powertec.com.au
1300 769 378

APAC AMT Alloy Modular Trailer, Single-Axle, Base Chassis


SKU
MAS-BH-00373
MPN
AP-AMT-SA

Description

APAC's Single-Axle Alloy Modular Trailer is part of the company's AMT Platform, a mounting system built from interchangeable modules that allows simple reconfiguration and redeployment.

This is a Trailer Base Chassis, which can be thought of as the base building block from which other modules and subsystems are attached. It is a Single-Axle Trailer, which provides a deck length of 2.6 m and width of 1.6 metres. This model is shorter than the dual-axle trailer by 400 mm.

The Chassis is manufactured in Queensland using heavy gauge medium-structural grade aluminium.

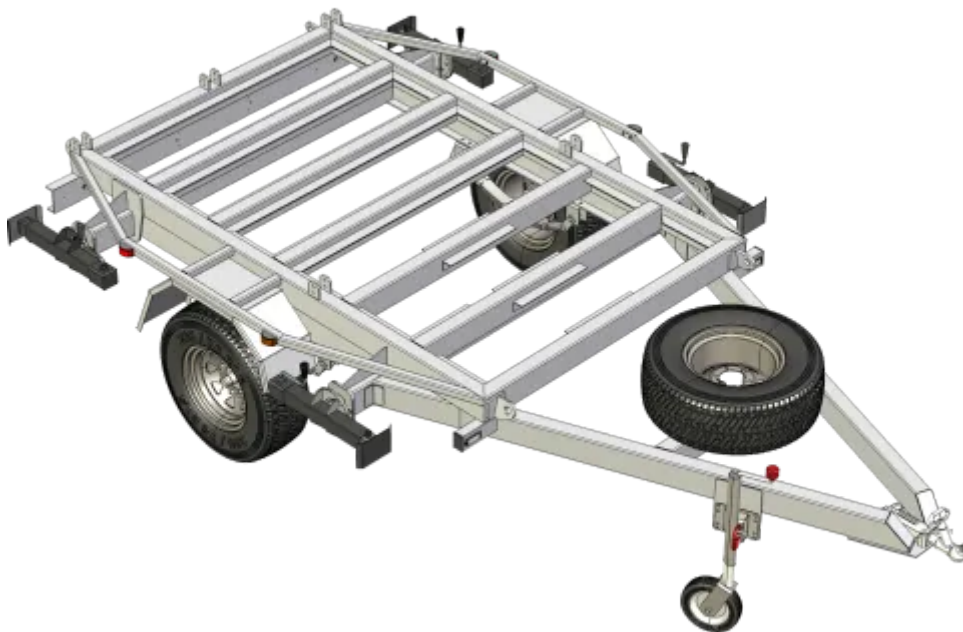

[APAC Infrastructure](#)

APAC Infrastructure is an Australian metal fabrication company dedicated to high tech industries in the commercial, industrial, and defence sectors. Our team is committed to evolving our solutions to meet the rapidly changing needs of our rapidly changing world, ensuring your team deliver solutions at the very forefront of technological development. APAC develops made-to-measure height systems for ...

Physical Specification

Subtype

[Trailer](#)

Weight

419 kg

Dimensions

4,500 × 2,500 × 990 mm

No. Axles

1

Trailer Coupling

50 mm Ball Hitch

Braking System

Mechanical Brakes

Running Clearance

600 mm

Deck Height

850 mm

Trailer Connector

7-Pin Flat

Suspension

Leaf Spring

Available Interfaces

Quantity

Mounting

7	APAC AMT Cross Member
1	APAC AMT Flooring Attachment

Subcomponents

Quantity	Name
4	Levelling Jack, 1500 kg Rated
1	Mechanical Drum Axle 6-Stud, 1400 kg Rated
3	16 x 8 x 245 Landcruiser 0 Offset Rims
3	245/75 R16 Light Truck Tyres, incl. 1x Spare Tyre
1	Heavy Duty Safety Chain Kit, 10 mm Chain, 2500 kg Rated
1	10" Solid Rubber Swivel Jockey Wheel, Heavy Duty Brackets
2	Eye-to-Eye Leaf Spring Suspension, 1500 kg rated
1	50 mm Ball Plunger Coupling, 3500 kg Rated

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

