

Powertec Wireless Technology ABN: 42 082 948 463 PO Box 1034, Ashmore City Queensland, Australia, 4214 sales@powertec.com.au 1300 769 378

Cambium C050910C801A ePMP 5 GHz Force 300-25 High Gain Radio (ROW) (ANZ cord)

SKU: WIF-CB-00087 MPN: C050910C801A

Description

Cambium's ePMP Force 300 are a third generation multipoint subscriber radio designed as an economical solution for point-to-multipoint applications.

Combining the latest 802.11ac Wave 2 chipset and the field proven TDD MAC of ePMP, the Force 300-25 offers an affordable point to point product and a long range subscriber module for the ePMP 3000 and ePMP 3000L Access Points.

Force 300-25 provides moderate to long range connectivity with its 25 dBi integrated 470 mm diameter dish antenna. With its narrow beamwidth this model is the ideal choice for operation in noisy urban environments.

Supporting modulation up to 256QAM in 2x2 MIMO the subscriber is capable of peak throughput up to 600 Mb/s.

Read More

Force 300 radios are designed to connect to ePMP 3000 series wireless access points. The subscriber's high gain 25 dBi dish antenna permits high data speeds within 10 kilometres and basic connectivity significantly further. Actual achieved data rates will of course depend on channel conditions and environment.

Read More





Cambium Networks

Cambium Networks enables service providers; enterprises; governmental and military agencies; oil, gas and utility companies; Internet service providers; and public safety organizations to build powerful communications networks, reach users from 200 kilometers across mountain tops down to their devices, and intelligently manage their business Wi-Fi infrastructure through end-to-end network ...

Network Interfaces

Wireless I	nterface	25						
Topology:		•	Multipoint Terminal/Subscriber, Point-to-Point (P2P)		, Max. Clients:		1	
Max. Throughp	ut:	600 Mb/s			nannel Width:	80 MHz		
Encryption:		AES-128						
Transmit Powe	er:	27 dBm		Receive Sens	itivity:	-87 dBm		
Agg. Data Rate	:	600 Mb/s		Agg. Channel	Width:	80 MHz		
Wireless Bands	Path Mode	Start Frequency	Stop Frequency	МІМО	Channel Width	Modulation	Max. Data Rate	
5 GHz	TDD	4910 MHz	5970 MHz	2x2 MIMO	80 MHz	256QAM	600 Mb/s	

Ethernet Interfaces

Interface	Quantity	Function	Signalling	PoE Input
RJ45 Copper	1	Data & PoE	100BASE-T, 1000BASE-T	Cambium 30 Vdc

Antenna Specifications


Start Frequency:	4910 MHz	Polarisation:	Dual Pol (V, H)
Stop Frequency:	5970 MHz	Input Impedance:	50

Frequency Test Data

Start Freq.	Stop Freq.	Peak Gain	Azimuth	Elevation	F/B Ratio	XPD
4910 MHz	5970 MHz	25 dBi	10°	10°	> 25 dB	> 20 dB

Polar Patterns

Start Frequency: 5150 MHz Stop Frequency: 5850 MHz

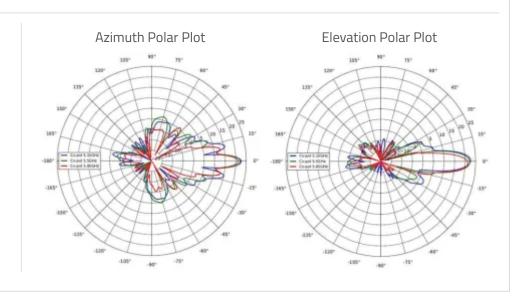

Physical Specification

Subtype:	Wireless Bridge	Dimensions:	310 × 470 × 470 mm
Min. Operating Temperature:	-30 °C	Weight:	2.4 kg
Max. Operating Temperature:	60 °C	Materials:	Aluminium
Ingress Protection:	IP55	Compliance/Certifications:	R-NZ
		RCM	,

Power Specifications

Power Options: Power over Ethernet Typical Consumption: 12 W

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

