

Telegärtner NEX10(r) Male Right Angle Connector for RG-402 Cable, Angle Plug Screw G10 (UT-141)

SKU: ACC-TG-00047

MPN: 100025579

Description

Introducing the Telegärtner NEX10® Male Angle Plug Screw G10 Connector, designed to optimize your coaxial connections with precision and reliability. Crafted for seamless integration, this angle plug ensures a secure fit and excellent signal transmission in even the most demanding environments.

With its robust construction and advanced engineering, the Telegärtner NEX10® Male Angle Plug Screw G10 Connector guarantees exceptional performance and durability. Whether you're in telecommunications, broadcasting, or industrial applications, trust Telegärtner to deliver top-notch connectivity solutions.

The Telegärtner NEX10® Male Right Angle Connector is engineered for high-performance coaxial connections, particularly suited for RG-402 cables. This advanced connector is ideal for use in telecommunications, broadcasting, and various industrial applications where reliable signal transmission is critical. Its design features a right-angle plug that offers a secure, free-hanging mounting style, facilitating installations in tight spaces without compromising on performance.

Constructed with a robust brass body and copper-silver alloy plating, this connector ensures durability and excellent conductivity. It effectively operates within a frequency range of 0 GHz to 6 GHz, making it versatile for a wide array of RF



Telegärtner



As family-owned company the Telegärtner Group has developed to an international network of affiliated companies specialising in intermediate and end products for telecommunications and data communications for customers with the most exacting demands for high-tech applications over the last 70 years.

Since the company was set up in 1945 Telegärtner has seen steady growth and has continually expanded ...

RF Connector Interface

RF Interface	Body Shape	Mounting
NEX10 Male	Right Angle	Free Hanging

RF Specification

Start Frequency:	0 GHz	Input Impedance:	50
Stop Frequency:	6 GHz	RF Operating Voltage:	≤ 1500 Vrms
PIM, 3rd Order:	≤ -166 dBc		


VSWR Measurement

Frequency	Return Loss
2000 MHz	≤ 36 dB
4000 MHz	≤ 32 dB
6000 MHz	≤ 30 dB

Physical Specification

Cable Group:	RG-402	Conductor Attachment:	Cable, Solder
Body Material:	Brass	Contact Material:	Brass
Body Plating:	Copper-Silver Alloy (Cu5Ag2), CuSnZn3	Contact Plating:	Copper-Silver Alloy (Cu2Ag5 / Cu2Ag3)
Insulator Material:	PTFE / Teflon	Min. Operating Temperature:	-55 °C
Dimensions:	27.65 × 11.9 × 11.9	Max. Operating Temperature:	125 °C
Compliance/Certifications:	ISO 9001 Quality Management	Ingress Protection:	IP68
RoHS		Mating Cycles:	> 100

Drawing

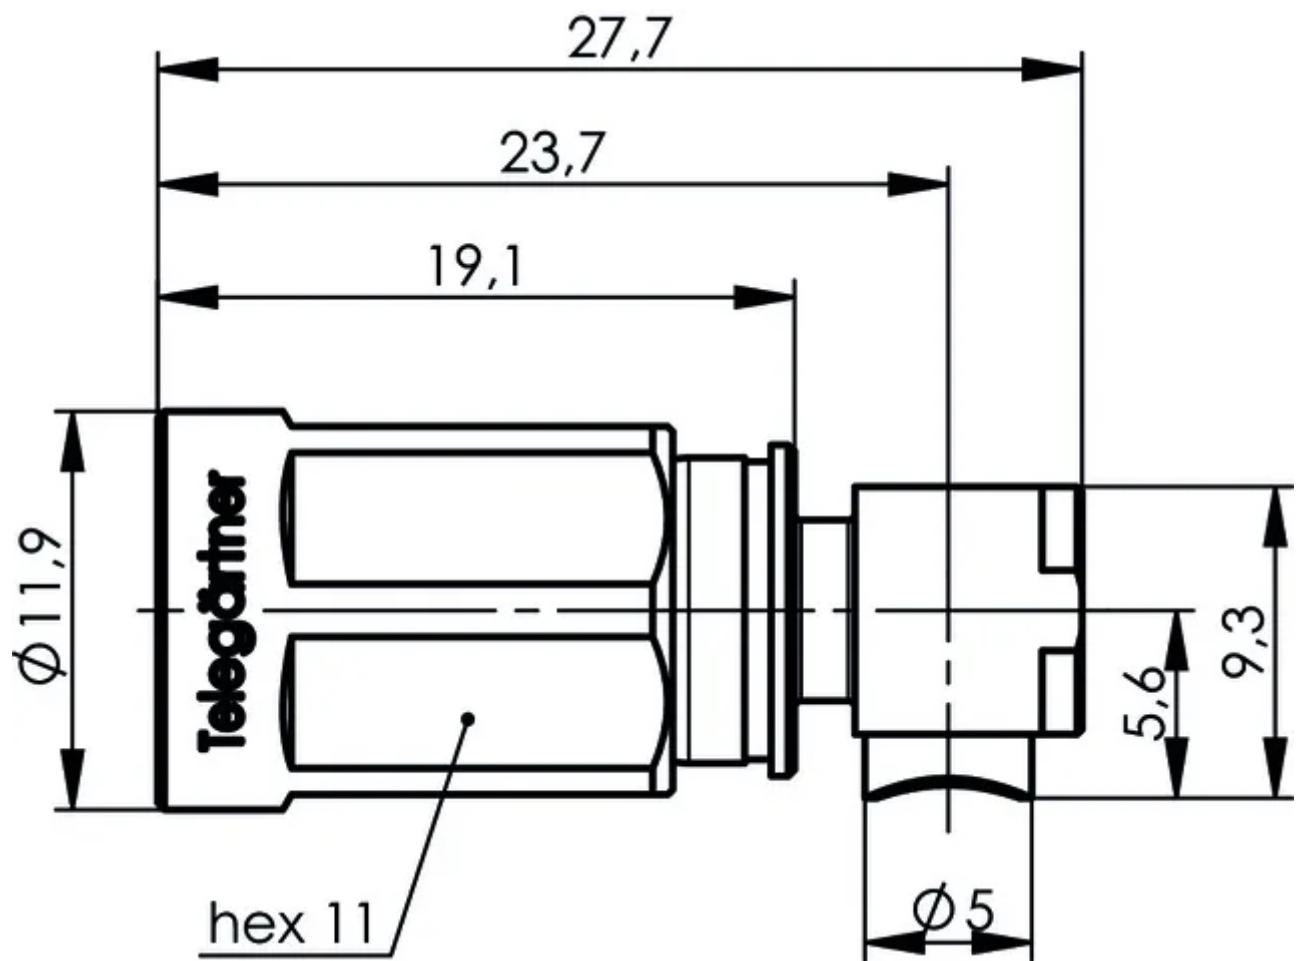

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

