

Telegärtner 2.2-5 Male Connector for 1/4" Corrugated Cable, SIMFix, clamp/clamp, Screw Type, G20 (1/4" Flex)

SKU: ACC-TG-00052

MPN: 100025465

Description

Introducing the Telegärtner 2.2-5 Male Connector, tailored for 1/4" Corrugated Cable applications.

With SIMFix technology, installation becomes effortless, ensuring a seamless setup every time. Its clamp/clamp mechanism guarantees a secure fit, providing peace of mind in critical connections. Featuring a Screw Type design, it offers both reliability and ease of use.

Compatible with G20 (1/4" Flex) cables, it's built to excel in demanding environments. Trust Telegärtner for top-tier performance and connectivity solutions that stand the test of time.

[Read More](#)



Telegärtner



As family-owned company the Telegärtner Group has developed to an international network of affiliated companies specialising in intermediate and end products for telecommunications and data communications for customers with the most exacting demands for high-tech applications over the last 70 years.

Since the company was set up in 1945 Telegärtner has seen steady growth and has continually expanded ...

RF Connector Interface

RF Interface	Body Shape	Mounting
2.2-5 Male	Straight	Free Hanging

RF Specification

Start Frequency:	0 GHz	Input Impedance:	50
Stop Frequency:	6 GHz	Inner Contact Resistance:	$\leq 2 \text{ m}\Omega$
PIM, 3rd Order:	$\leq -160 \text{ dBc}$	Outer Contact Resistance:	$\leq 1 \text{ m}\Omega$
		RF Operating Voltage:	$\leq 1500 \text{ Vrms}$


VSWR Measurement

Frequency	Return Loss
1000 MHz	$\leq 36 \text{ dB}$
2000 MHz	$\leq 35 \text{ dB}$
3000 MHz	$\leq 32 \text{ dB}$
4000 MHz	$\leq 27 \text{ dB}$
6000 MHz	$\leq 21 \text{ dB}$

Physical Specification

Cable Group:	1/4 Corrugated	Conductor Attachment:	Cable, Captivated
Body Material:	Lead-Brass Alloy (CuZn39Pb3)	Contact Material:	Beryllium-Copper-Lead (CuBe2Pb)
Body Plating:	Nickel	Contact Plating:	Copper-Silver Alloy (Cu2Ag5 / Cu2Ag3)
Insulator Material:	PTFE / Teflon		
Dimensions:	39 × 17.5 × 17.5	Min. Operating Temperature:	-55 °C
Compliance/Certifications:	ISO 9001 Quality Management	Max. Operating Temperature:	90 °C
RoHS		Ingress Protection:	IP67
		Mating Cycles:	> 100

Drawing

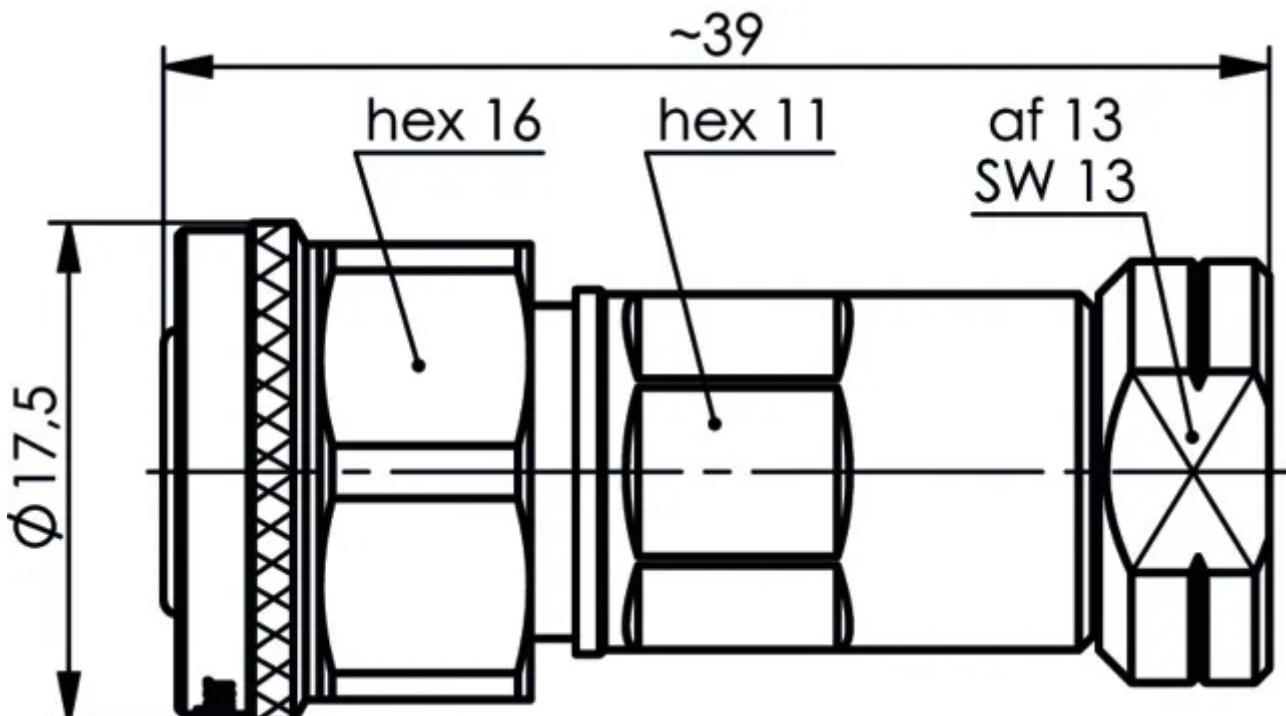

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

