

# RG-402 Patch Cable N Male to SMA Male Low PIM

## 50cm

SKU: ACC-PT-00305  
 MPN: CA-R402-N1SA1.050  
 Barcode: 9337692002526

### Description

The RG-402 Patch Cable, featuring N Male to SMA Male connectors and measuring 50 cm, is engineered by Powertec for superior RF performance. Designed with Powertec’s PSF-402 Series coaxial cable, this 0.141" semi-flexible cable offers low loss and supports frequencies up to 34 GHz, making it ideal for efficient component interconnection. Its bright blue 4.2 mm outer jacket is not only visually distinctive but also highly durable, preventing solder joint failures and allowing flexibility with bends directly behind the fillet.


This cable boasts nearly 100% RF shielding thanks to its tin-soaked copper braid, and it is hand-formable, making it suitable for microwave-grade applications with mode-free operation up to 34 GHz. The RG-402 is known for its low Passive Intermodulation (PIM) with a 3rd Order PIM rating of -120 dBc, ensuring optimal signal integrity. It accommodates over 500 mating cycles, ensuring long-term reliability.

Operating...

[Read More](#)



### RF Specification

<p>Start Frequency: </p> <p>PIM, 3rd Order: -120 dBc</p>	<p><b>Powertec</b> 0 GHz</p> <p><small>Powertec is a wireless technology manufacturer and systems integrator based in Australia. Operating since 1995, Powertec has grown to become the leading wireless technology distributor in its region, and a leading Infratech systems developer. Supporting over 1500 partners the company provides procurement, design, project management, and support services across Australia, New Zealand, Pacific ...</small></p>	<p>Stop Frequency: 6 GHz</p>	
<p>VSWR Measurement</p>			

**Frequency**

3000 MHz

6000 MHz

**VSWR** $\leq 1.2:1$  $\leq 1.5:1$ 

# Physical Specification

Subtype:	Patch Cable	Length:	0.5 m
----------	-------------	---------	-------

Mating Cycles:	> 500	Weight:	63 g
----------------	-------	---------	------

Compliance/Certifications:	ISO 9001 Quality Management
----------------------------	-----------------------------

RoHS	
------	--

**RF Connectors****RF Interface**

N Male

SMA Male

**Body Shape**

Straight


Straight

**Mounting**

Free Hanging

Free Hanging

## Drawing

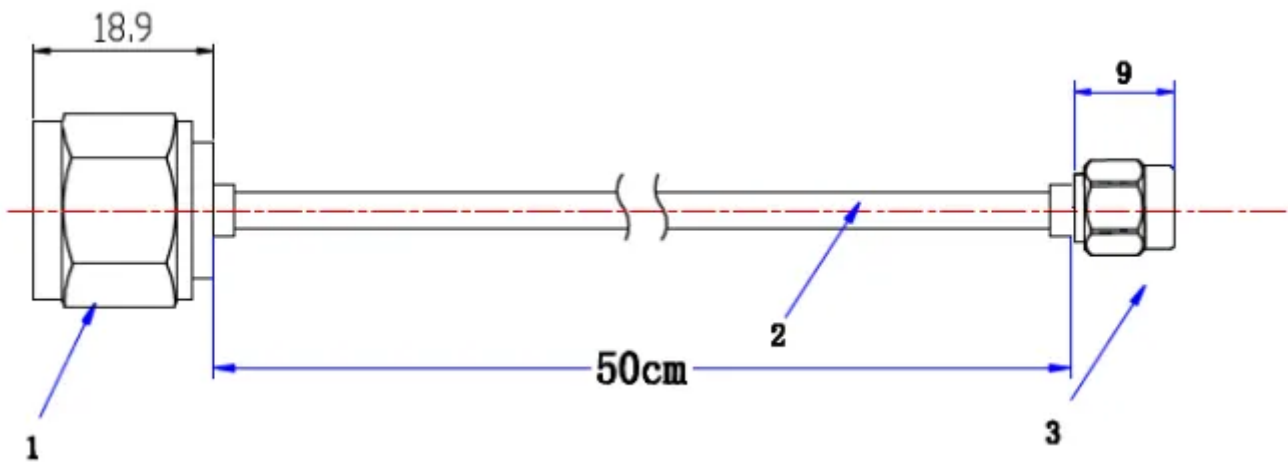

# PSF-402

Min. Frequency:	0 GHz	Max. Frequency:	34 GHz
Impedance:	50	Shielding Effectiveness:	> 110 dB
Min. Bend Radius Static:	8 mm	Colour:	Blue
Min. Bend Radius Dynamic:	40 mm		

Cable Layers

Layer	Diameter	Materials
Inner Conductor	0.93 mm	Silver Plated Copper (SC)
Dielectric	3.00 mm	PTFE / Teflon
Outer Conductor	3.52 mm	Tin Soaked Copper Braid
Outer Jacket	4.20 mm	Polyolefin LSZH

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

