

Page



Powertec Wireless Technology
ABN: 42 082 948 463
PO Box 1034, Ashmore City
Queensland, Australia, 4214
sales@powertec.com.au
1300 769 378

PSF-402 Patch Cable N Female to QMA Male Right Angle, 50cm

SKU
ACC-PT-00365
MPN
CA-R402-N2QA1RA.050
Barcode
9337692002557

Description

The PSF-402 Patch Cable N Female to QMA Male Right Angle, 50cm, is a high-performance RF coaxial cable developed by Powertec. This cable features a PSF-402 type, 0.141" semi-flexible, low-loss design with a distinctive bright blue 4.2 mm outer jacket. It is capable of supporting frequencies up to 34 GHz, making it an efficient balance between performance and cost for various RF applications.

The cable's construction includes a tin-soaked copper braid providing near-total RF shielding, while its malleable outer jacket prevents solder joint failures, allowing bends immediately behind the fillet. This design ensures easy forming, excellent shielding, and very low Passive Intermodulation (PIM), rated at -120 dBc. The cable is 0.5 m long, weighs 63 grams, and withstands over 500 mating cycles.

One end of the cable features an N Female connector with a straight body and bulkhead mount, while the other end has a QMA Male connector with a right...

[Read More](#)





Powertec

Powertec is a wireless technology manufacturer and systems integrator based in Australia. Operating since 1995, Powertec has grown to become the leading wireless technology distributor in its region, and a leading Infratech systems developer. Supporting over 1500 partners the company provides procurement, design, project management, and support services across Australia, New Zealand, Pacific ...

RF Specification

Start Frequency

0 GHz

PIM, 3rd Order

-120 dBc

Stop Frequency

6 GHz

VSWR Measurement

Frequency VSWR

3000 MHz $\leq 1.2:1$

6000 MHz $\leq 1.5:1$

Physical Specification

Subtype

[Patch Cable](#)

Mating Cycles

> 500

Compliance/Certifications

Length

0.5 m

Weight

63 g

RF Connectors

RF Interface Body Shape Mounting

[N Female](#)

[Straight](#)


[Bulkhead](#)

[QMA Male](#)

[Right Angle](#)

[Free Hanging](#)

Drawing

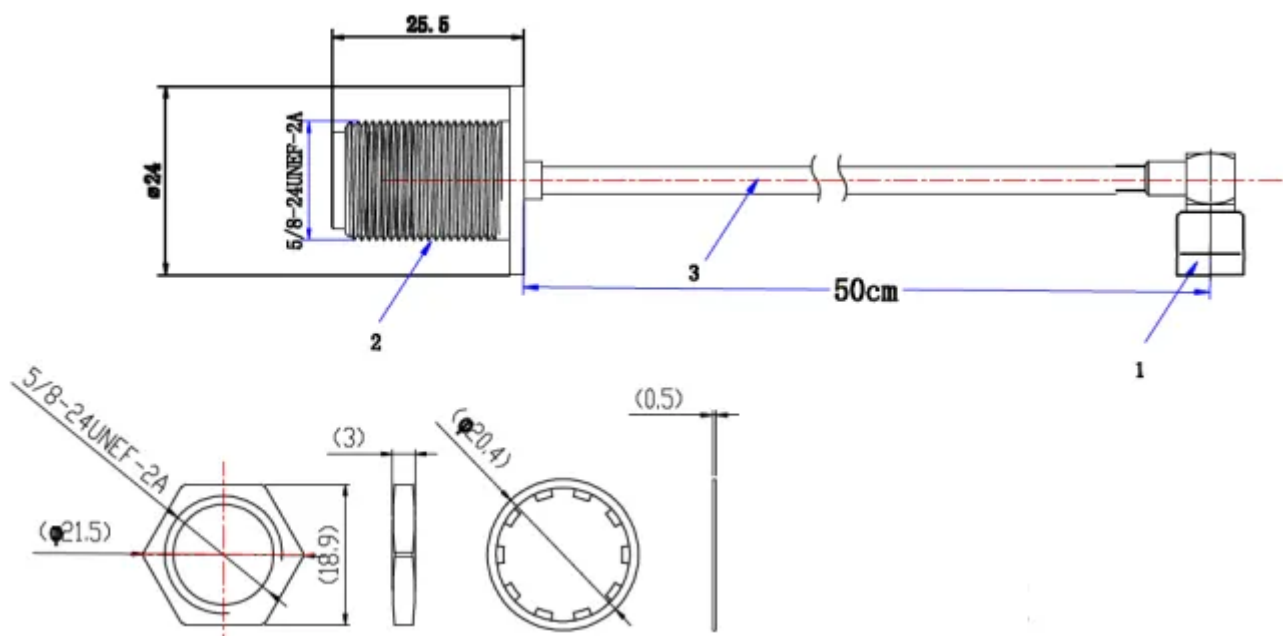

PSF-402

Min. Frequency

0 GHz

Impedance

50 Ω

Min. Bend Radius Static

8 mm

Min. Bend Radius Dynamic

40 mm

Max. Frequency

34 GHz

Shielding Effectiveness

> 110 dB

Colour

Blue

Cable Layers

Layer	Diameter	Materials
Inner Conductor	0.93 mm	Silver Plated Copper (SC)
Dielectric	3.00 mm	PTFE / Teflon
Outer Conductor	3.52 mm	Tin Soaked Copper Braid
Outer Jacket	4.20 mm	Polyolefin LSZH

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

