

Page



Powertec Wireless Technology
ABN: 42 082 948 463
PO Box 1034, Ashmore City
Queensland, Australia, 4214
sales@powertec.com.au
1300 769 378

RG-402 Patch Cable N Male to N Male Low PIM 30cm

SKU
ACC-PT-00367
MPN
CA-R402-N1N1.030
Barcode
9337692002571

Description

The RG-402 Patch Cable N Male to N Male, 30cm (SKU: ACC-PT-00367), is a high-performance RF coaxial cable from Powertec, part number CA-R402-N1N1.030. Designed for demanding applications, this cable features a semi-rigid RG-402 structure, delivering superior RF shielding with a tin-plated copper tube, providing over 110 dB shielding effectiveness. It supports mode-free operation up to 34 GHz, ensuring optimal impedance control and minimal insertion loss.

Ideal for ultra-high performance systems, the RG-402 is commonly used in RF testing, electronic warfare, radar, and microwave radios. It requires specialised tooling for shaping, as it maintains precise dielectric and conductor spacing. Measuring 0.3m, this cable is built to endure multiple mating cycles, operating efficiently within a frequency range of 0 to 6 GHz, and offers a 3rd Order PIM rating of -155 dBc.

The cable is equipped with N Male connectors on both ends, with a straight...

[Read More](#)





Powertec

Powertec is a wireless technology manufacturer and systems integrator based in Australia. Operating since 1995, Powertec has grown to become the leading wireless technology distributor in its region, and a leading Infratech systems developer. Supporting over 1500 partners the company provides procurement, design, project management, and support services across Australia, New Zealand, Pacific ...

RF Specification

Start Frequency

0 GHz

PIM, 3rd Order

-155 dBc

Stop Frequency

6 GHz

VSWR Measurement

Frequency VSWR

3000 MHz $\leq 1.2:1$

6000 MHz $\leq 1.5:1$

Physical Specification

Subtype

[Patch Cable](#)

Mating Cycles

> 500

Compliance/Certifications

,

RoHS

Length

0.3 m


RF Connectors

RF Interface Body Shape Mounting

N Male Straight Free Hanging

N Male Straight Free Hanging

Drawing

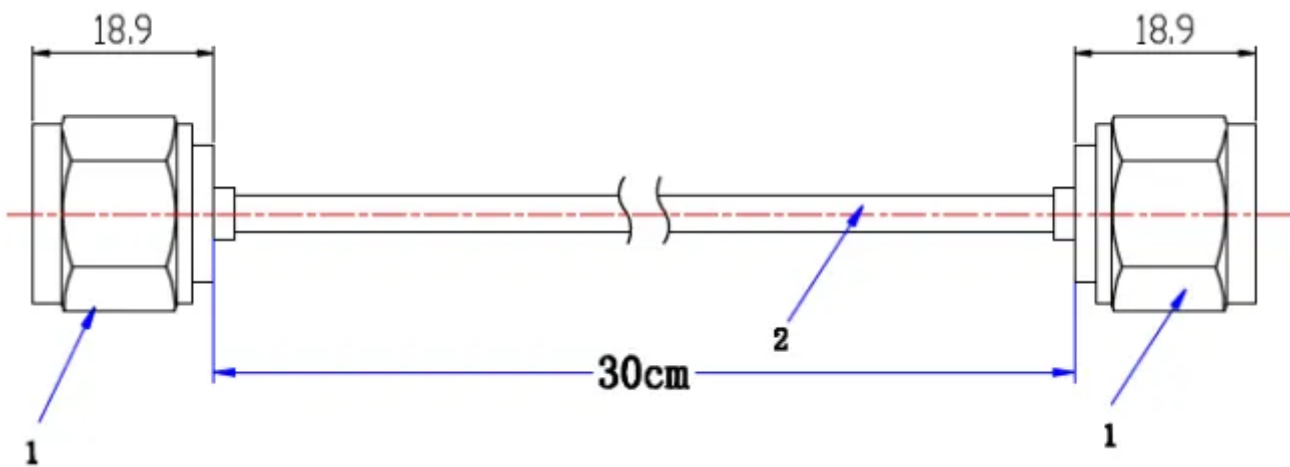

RG-402

Min. Frequency

0 GHz

Impedance

50 Ω

Min. Bend Radius Static

12.5 mm

Attenuation @ 1 GHz

0.37 dB/m

Max. Frequency

34 GHz

Shielding Effectiveness

> 110 dB

Cable Layers

Layer	Diameter	Materials
Inner Conductor	0.93 mm	Silver Plated Copper Clad Steel (SCCS)

Layer	Diameter	Materials
Dielectric	3.00 mm	PTFE / Teflon
Outer Conductor	3.58 mm	Copper Tube

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

