

# RG-402 Patch Cable N Male to SMA Male Low PIM

## 1m

SKU: ACC-PT-00374  
 MPN: CA-R402-N1SA1.1  
 Barcode: 9337692002793

### Description

The RG-402 Patch Cable N Male to SMA Male Low PIM 1m (SKU: ACC-PT-00374) by Powertec is a high-performance RF coaxial cable ideal for seamless component interconnection. Featuring the PSF-402 series, this 0.141" semi-flexible coaxial cable boasts a bright blue 4.2 mm outer jacket, offering an efficient balance between performance and cost. Capable of supporting frequencies up to 34 GHz, the PSF-402 is a microwave-grade cable known for its easy hand-forming, excellent shielding, and very low passive intermodulation (PIM).

The cable is designed with near 100% RF shielding, thanks to its tin-soaked copper braid, and its malleable jacket reduces solder joint failures, enabling bends close to the fillet. It is 1 metre long, weighs 75 grams, and can endure over 500 mating cycles. It operates within a frequency range of 0 GHz to 6 GHz, featuring a 3rd Order PIM rating of -120 dBc. Compliant with ISO 9001 and RoHS standards, it ensures quality...

[Read More](#)



### RF Specification

Start Frequency:	0 GHz	Stop Frequency:	6 GHz
PIM: -120 dBc	 <p>Powertec is a wireless technology manufacturer and systems integrator based in Australia. Operating since 1995, Powertec has grown to become the leading wireless technology distributor in its region, and a leading Infratech systems developer. Supporting over 1500 partners the company provides procurement, design, project management, and support services across Australia, New Zealand, Pacific ...</p>		
VSWR Measurement			

**Frequency**

3000 MHz

6000 MHz

**VSWR** $\leq 1.2:1$  $\leq 1.5:1$ 

# Physical Specification

Subtype:	Patch Cable	Length:	1 m
----------	-------------	---------	-----

Mating Cycles:	> 500	Weight:	75 g
----------------	-------	---------	------

Compliance/Certifications:	ISO 9001 Quality Management
----------------------------	-----------------------------

RoHS	
------	--

**RF Connectors****RF Interface**

N Male

SMA Male

**Body Shape**

Straight


Straight

**Mounting**

Free Hanging

Free Hanging

## Drawing

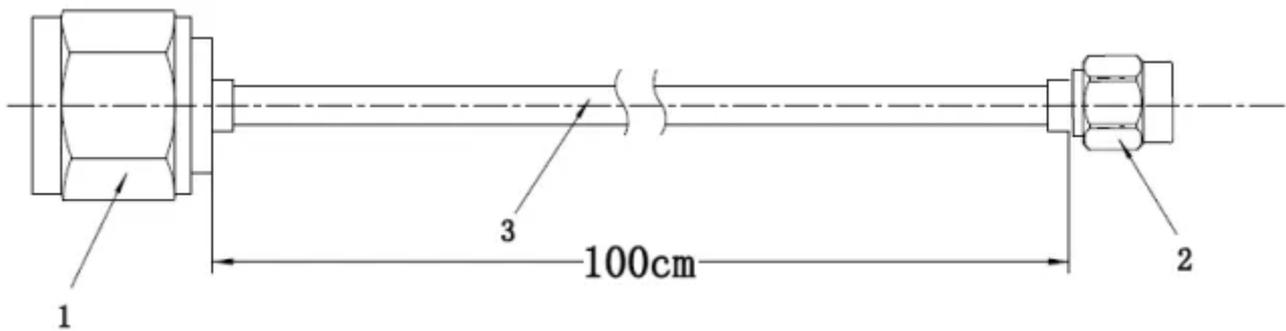

## PSF-402

Min. Frequency:	0 GHz	Max. Frequency:	34 GHz
-----------------	-------	-----------------	--------

Impedance:	50	Shielding Effectiveness:	> 110 dB
------------	----	--------------------------	----------

Min. Bend Radius Static:	8 mm	Colour:	Blue
--------------------------	------	---------	------

Min. Bend Radius Dynamic:	40 mm
---------------------------	-------

## Cable Layers

Layer	Diameter	Materials
Inner Conductor	0.93 mm	Silver Plated Copper (SC)
Dielectric	3.00 mm	PTFE / Teflon
Outer Conductor	3.52 mm	Tin Soaked Copper Braid
Outer Jacket	4.20 mm	Polyolefin LSZH

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

