

Powertec Wireless Technology ABN: 42 082 948 463 PO Box 1034, Ashmore City Queensland, Australia, 4214 sales@powertec.com.au 1300 769 378

Powertec RF Attenuator, 10 dB, 4.3-10 Female to 4.3-10 Male

SKU: IBC-PT-00029

MPN: PCM-AT10-DC38.432 Barcode: 9337692001666


Description

The Powertec RF Attenuator (SKU: IBC-PT-00029, Part Number: PCM-AT10-DC38.432) offers a reliable 10 dB attenuation across frequencies from 0 MHz to 3000 MHz. Designed with a 4.3-10 Female to 4.3-10 Male connector configuration, it ensures seamless integration within RF systems. This unit features a compact design with dimensions of $60 \times 19.5 \, \text{mm}$ and is equipped with an IP60 ingress protection rating, safeguarding against dust.

With an operating temperature range from -35 °C to 65 °C, the attenuator is suitable for various environmental conditions. It maintains an input impedance of 50 Ω and demonstrates excellent performance with a VSWR of less than 1.2:1 up to 3000 MHz. Manufactured by Powertec, a renowned Australian company, this product is part of their extensive range of RF passives, contributing to effective cellular network enhancement and wireless network development.

Powertec has been a leading force in wireless technology since...

Read More

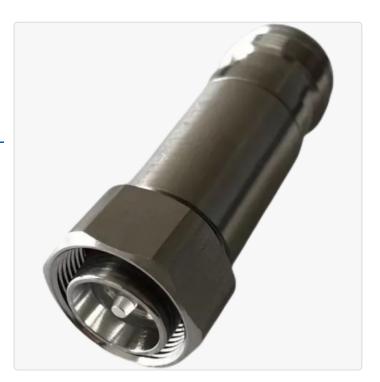



Powertec

Powertec is a wireless technology manufacturer and systems integrator based in Australia. Operating since 1995, Powertec has grown to become the leading wireless technology distributor in its region, and a leading Infratech systems developer. Supporting over 1500 partners the company provides procurement, design, project management, and support services across Australia, New Zealand, Pacific ...

RF Specification

Min. Frequency:	0 MHz	Input Impedance:	50	
Max. Frequency:	3000 MHz	Max. Input Power:	5 W	
Attenuation (Fixed):	10 dB			

Port Matrix


Port Function	RF Interface
Input	4.3-10 Male
Output	4.3-10 Female

Frequency Test Data

Start Frequency	Stop Frequency	VSWR
0 MHz	3000 MHz	< 1.2:1

Physical Specification

Attenuator	Min. Operating Temperature:	-35 °C
IP60	Max. Operating Temperature:	65 °C
60 x 19.5 x null		
0.1 kg		
	IP60 60 x 19.5 x null	IP60 Max. Operating Temperature: 60 x 19.5 x null

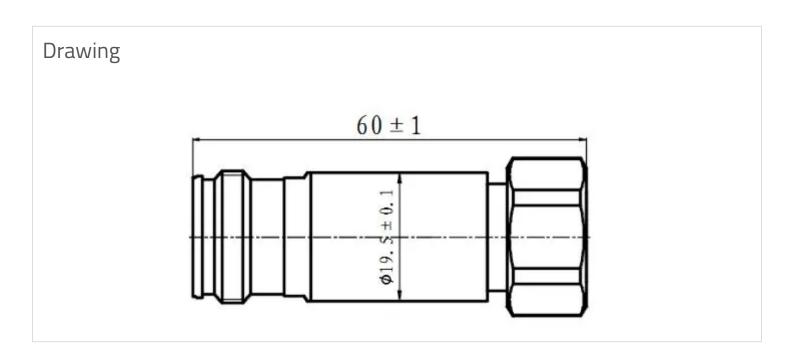

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

