

# RG-402 Patch Cable 4.3-10 Male to 4.3-10 Male Low PIM 30cm

SKU: IBC-PT-00088  
 MPN: CA-R402-431431.030

## Description

The RG-402 Patch Cable (SKU: IBC-PT-00088) is a high-performance RF cable from Powertec, featuring 4.3-10 Male connectors at both ends. With a length of 30 cm, this cable utilises Powertec’s PSF-402, a 0.141" Semi-Flexible, low-loss coaxial cable with a distinctive blue 4.2 mm outer jacket. Capable of supporting frequencies up to 34 GHz, the PSF-402 series offers an excellent balance of performance and cost, ideal for component interconnection.

This cable provides superior shielding with a tin-soaked copper braid and a malleable outer jacket that prevents solder joint failures. Its low PIM rating of -155 dBc and ability to withstand over 500 mating cycles ensure reliable performance. The declared operational frequency range is 0 to 6 GHz, offering mode-free operation up to 34 GHz.

Engineered for durability and precision, it achieves a VSWR of  $\leq 1.2:1$  at 3000 MHz and  $\leq 1.5:1$  at 6000 MHz, making it suitable for demanding RF applications...

[Read More](#)



## RF Specification

Start Frequency:	0 GHz	Stop Frequency:	6 GHz
PIM: -155 dBc	 <p>Powertec is a wireless technology manufacturer and systems integrator based in Australia. Operating since 1995, Powertec has grown to become the leading wireless technology distributor in its region, and a leading Infratech systems developer. Supporting over 1500 partners the company provides procurement, design, project management, and support services across Australia, New Zealand, Pacific ...</p>		
VSWR Measurement			

**Frequency**

3000 MHz

6000 MHz

**VSWR** $\leq 1.2:1$  $\leq 1.5:1$ 

# Physical Specification

Subtype:	Patch Cable	Length:	0.3 m
----------	-------------	---------	-------

Mating Cycles:	> 500	Weight:	58 g
----------------	-------	---------	------

Compliance/Certifications:	ISO 9001 Quality Management
----------------------------	-----------------------------

RoHS	
------	--

**RF Connectors****RF Interface**

4.3-10 Male

4.3-10 Male

**Body Shape**

Straight


Straight

**Mounting**

Free Hanging

Free Hanging

## Drawing

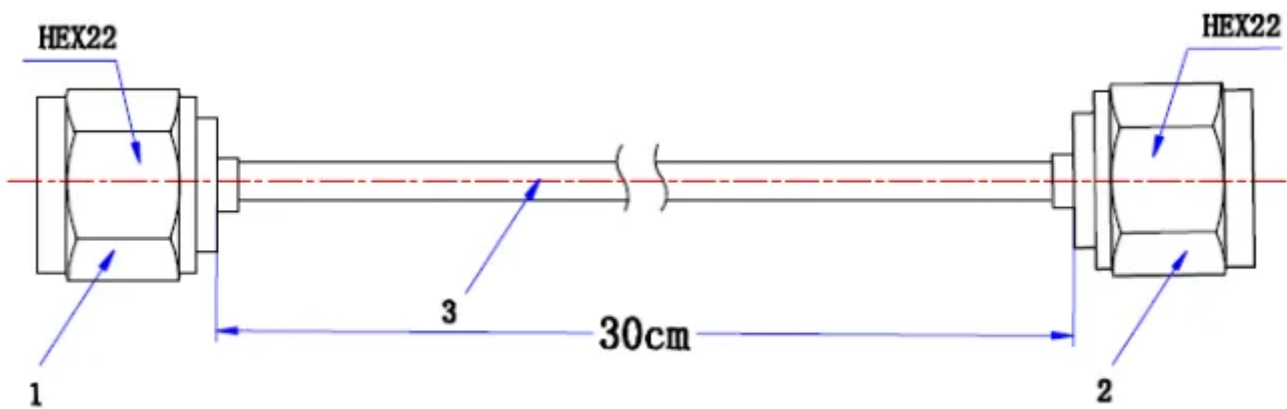

# PSF-402

Min. Frequency:	0 GHz	Max. Frequency:	34 GHz
Impedance:	50	Shielding Effectiveness:	> 110 dB
Min. Bend Radius Static:	8 mm	Colour:	Blue
Min. Bend Radius Dynamic:	40 mm		

Cable Layers

Layer	Diameter	Materials
Inner Conductor	0.93 mm	Silver Plated Copper (SC)
Dielectric	3.00 mm	PTFE / Teflon
Outer Conductor	3.52 mm	Tin Soaked Copper Braid
Outer Jacket	4.20 mm	Polyolefin LSZH

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

