

# PSF-402 Patch Cable 4.3-10 Male to SMA Male, Low PIM, 2m

SKU: IBC-PT-00106

MPN: CA-R402-431SA1.2

Barcode: 9337692005039

## Description

The PSF-402 Patch Cable, model CA-R402-431SA1.2, from Powertec offers a reliable connection solution for RF applications. This 2m coaxial cable features a 4.3-10 Male to SMA Male connector configuration, ensuring compatibility with a wide range of equipment. It is constructed from PSF-402, a 0.141" semi-flexible, low-loss coaxial cable with a bright blue 4.2 mm outer jacket. The cable supports frequencies up to 34 GHz, making it ideal for high-frequency applications while maintaining cost-effectiveness.

Engineered for durability, the PSF-402 Patch Cable withstands over 500 mating cycles and operates effectively between 0 GHz to 6 GHz. Its tin-soaked copper braid provides nearly 100% RF shielding, reducing interference and ensuring consistent performance. The malleable outer jacket allows for easy forming and eliminates solder joint failures, accommodating bends near the fillet without compromising integrity.

This cable meets ISO 9001...

[Read More](#)



## Powertec

Powertec is a wireless technology manufacturer and systems integrator based in Australia. Operating since 1995, Powertec has grown to become the leading wireless technology distributor in its region, and a leading Infratech systems developer. Supporting over 1500 partners the company provides procurement, design, project management, and support services across Australia, New Zealand, Pacific ...

# RF Specification

Start Frequency:	0 GHz	Stop Frequency:	6 GHz
------------------	-------	-----------------	-------

# Physical Specification

Subtype:	Patch Cable	Length:	2 m
Mating Cycles:	> 500	Weight:	100 g
Compliance/Certifications:	ISO 9001 Quality Management		
RoHS			

# RF Connectors

RF Interface

- 4.3-10 Male
- SMA Male


Body Shape

- Straight
- Straight

Mounting

- Free Hanging
- Free Hanging

# Drawing

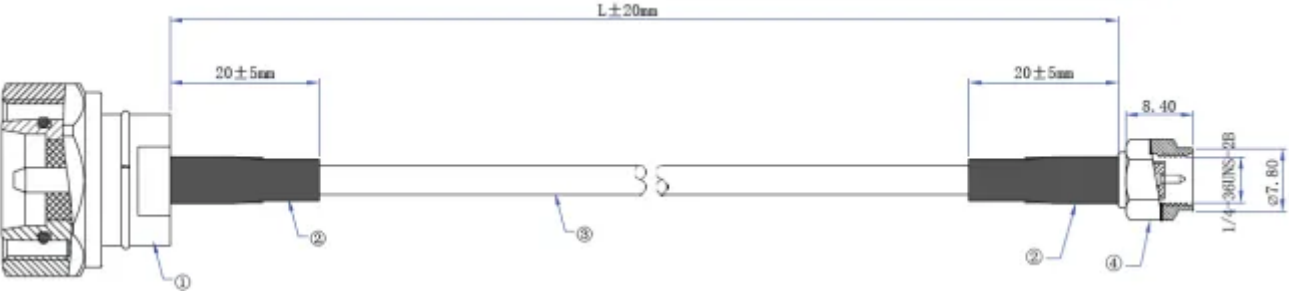

# PSF-402

Min. Frequency:	0 GHz	Max. Frequency:	34 GHz
Impedance:	50	Shielding Effectiveness:	> 110 dB
Min. Bend Radius Static:	8 mm	Colour:	Blue
Min. Bend Radius Dynamic:	40 mm		

## Cable Layers

Layer	Diameter	Materials
Inner Conductor	0.93 mm	Silver Plated Copper (SC)
Dielectric	3.00 mm	PTFE / Teflon
Outer Conductor	3.52 mm	Tin Soaked Copper Braid
Outer Jacket	4.20 mm	Polyolefin LSZH

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

