

Powertec Wireless Technology ABN: 42 082 948 463 PO Box 1034, Ashmore City Queensland, Australia, 4214 sales@powertec.com.au 1300 769 378

# Powertec RF Power Divider 2-Way, 698-3800MHz, SMA Female, Wilkinson, 22dB isolation

SKU: IBC-PT-00103

MPN: PCM-PD2-6938.SA2 Barcode: 9337692004360

#### Description

The Powertec RF Power Divider 2-Way (SKU: IBC-PT-00103) is a high-performance component designed for dividing RF signals across a frequency range of 698 MHz to 3700 MHz. Equipped with SMA Female connectors for both input and output, this divider ensures seamless integration into various RF systems. Its compact dimensions of  $88 \times 60 \times 21$  mm and IP60 rating make it suitable for indoor installations, operating efficiently in temperatures from -30 °C to 65 °C.

Key specifications include a 3 dB coupling value, a VSWR of less than 1.3:1, an insertion loss of 0.80 dB, and an inter-port isolation exceeding 20 dB. The device maintains a 50  $\Omega$  input impedance, ensuring compatibility with standard RF equipment. Manufactured by Powertec, a leading Australian wireless technology provider, this power divider exemplifies quality and reliability, backed by over two decades of industry expertise.

Ideal for applications requiring precise signal management...

Read More





#### Powertec

Powertec is a wireless technology manufacturer and systems integrator based in Australia. Operating since 1995, Powertec has grown to become the leading wireless technology distributor in its region, and a leading Infratech systems developer. Supporting over 1500 partners the company provides procurement, design, project management, and support services across Australia, New Zealand, Pacific ...

# **RF** Specification

Min. Frequency:	698 MHz	Input Impedance:	50
Max. Frequency:	3700 MHz	Max. Input Power:	50 W
Coupling / Split:	3 dB		

### Port Matrix


Port Function	RF Interface
Input	SMA Female
Output	SMA Female

## Frequency Test Data

Start Frequency	Stop Frequency	VSWR	Insertion Loss	Inter-Port Iso.
698 MHz	3700 MHz	< 1.25:1	0.8 dB	> 20 dB

# **Physical Specification**

Input Ports:	1	Min. Operating Temperature:	-30 °C
Output Ports:	2	Max. Operating Temperature:	65 °C
Subtype:	Power Divider		
Ingress Protection:	IP60		
Dimensions:	88 by 60 by 21		
Weight:	0.18 kg		

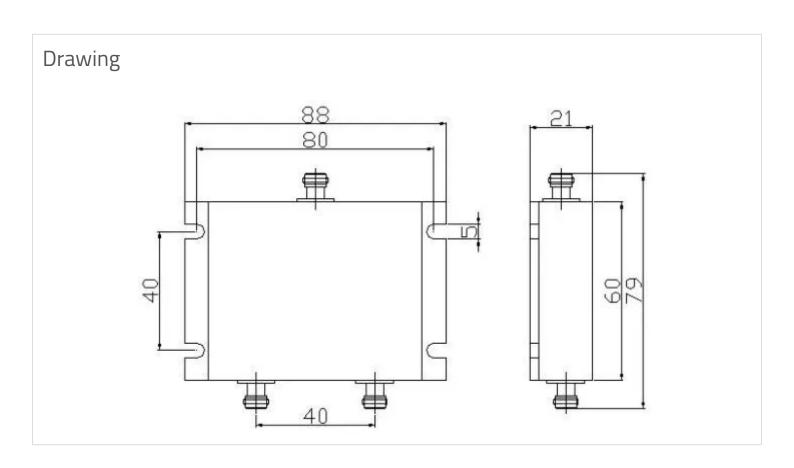

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

