

Page



Powertec Wireless Technology
ABN: 42 082 948 463
PO Box 1034, Ashmore City
Queensland, Australia, 4214
sales@powertec.com.au
1300 769 378

Huang Liang MMCX Male to SMA Female Precision Adapter

SKU
ACC-HL-00064
MPN
101-A740.199

Description

The Huang Liang MMCX Male to SMA Female Precision Adapter (Part Number: 101-A740.199) is a high-quality 50 Ω coaxial RF adapter. Featuring an MMCX Male interface with a straight, free-hanging design compatible with MMCX Female interfaces, and an SMA Female interface with a similar configuration compatible with SMA Male interfaces, this adapter operates across a frequency range of 0 GHz to 6 GHz.

Constructed from stainless steel (303) with a passivated finish, this adapter ensures durability and corrosion resistance. The inner contacts, made of beryllium copper with gold plating, offer enhanced conductivity and reliability. It functions effectively within a temperature range of -65 °C to 165 °C, making it suitable for various demanding environments.

Compliant with ISO 9001 Quality Management and RoHS standards, this adapter exemplifies Huang Liang's commitment to quality. With over 30 years of experience, Huang Liang is renowned for its...

[Read More](#)



Huang Liang

Huang Liang is a Taiwanese manufacturer of precision coaxial connectors, adapters and cable assemblies. The company provide solutions to different industries including military, telecommunications, and aerospace.

Over 30 years of experience in developing and designing RF products, Huang Liang has overcome many challenges, resulting in unmatched expertise in the field of RF technology. Huang Liang ...

RF Connector Interface

RF Interface Body Shape Mounting

[MMCX Male](#) [Straight](#) [Free Hanging](#)

[SMA Female](#) [Straight](#) [Free Hanging](#)

RF Specification

Start Frequency

0 GHz

Stop Frequency

6 GHz

RF Operating Voltage

≥ 170 Vrms

Input Impedance

50 Ω

Inner Contact Resistance

≤ 6 m Ω

Insulation Resistance

$\geq 5000 \text{ m}\Omega$

Outer Contact Resistance

$\leq 2 \text{ m}\Omega$

VSWR Measurement

Frequency VSWR Insertion Loss

6000 MHz $\leq 1.2:1$ 0.15 dB

Physical Specification

Body Material

[Stainless Steel \(303\)](#)

Body Plating

[Passivated](#)

Insulator Material

[PTFE / Teflon](#)

Weight

1.68 g

Compliance/Certifications

[ISO 9001 Quality Management](#)

,

[RoHS](#)

Contact Material

[Beryllium Copper](#)

Contact Plating

[Gold](#)

Min. Operating Temperature

-65 °C

Max. Operating Temperature


165 °C

Mating Cycles

> 500

Drawing

Image

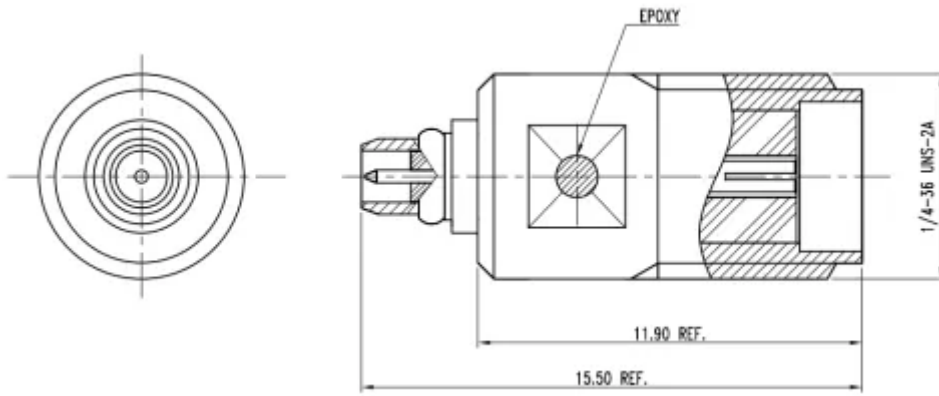

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

