

Page



Powertec Wireless Technology
ABN: 42 082 948 463
PO Box 1034, Ashmore City
Queensland, Australia, 4214
sales@powertec.com.au
1300 769 378

Huang Liang SMA Female to SMP Male Adapter

SKU
ACC-HL-00069
MPN
145-A035.119

Description

The Huang Liang SMA Female to SMP Male Adapter (Part Number: 145-A035.119) is a high-quality 50 Ω coaxial RF adapter. It features a straight-body SMA Female interface and a straight-body SMP Male interface, both designed for free-hanging mounting. This adapter supports SMA Male and SMP Female connections and operates within a frequency range of 0 GHz to 18 GHz.

Constructed from Stainless Steel (303) with a passivated finish, this adapter ensures durability and reliability. The inner contacts are made of Beryllium Copper with gold plating for enhanced connectivity. It performs efficiently in temperatures ranging from -65 °C to 125 °C.

Complying with ISO 9001 Quality Management and RoHS standards, this product guarantees high-quality and environmentally safe performance. Huang Liang, a Taiwanese manufacturer with over 30 years of expertise in RF technology, supplies precision coaxial connectors, adapters, and cable assemblies for various...

[Read More](#)



Huang Liang

Huang Liang is a Taiwanese manufacturer of precision coaxial connectors, adapters and cable assemblies. The company provide solutions to different industries including military, telecommunications, and aerospace.

Over 30 years of experience in developing and designing RF products, Huang Liang has overcome many challenges, resulting in unmatched expertise in the field of RF technology. Huang Liang ...

RF Connector Interface

RF Interface Body Shape Mounting

[SMA Female](#) [Straight](#) [Free Hanging](#)

[SMP Male](#) [Straight](#) [Free Hanging](#)

RF Specification

Start Frequency

0 GHz

Stop Frequency

18 GHz

RF Operating Voltage

≥ 335 Vrms

Input Impedance

50 Ω

Inner Contact Resistance

≤ 6 m Ω

Insulation Resistance

$\geq 5000 \text{ m}\Omega$

Outer Contact Resistance

$\leq 3 \text{ m}\Omega$

VSWR Measurement

Frequency VSWR Insertion Loss

18000 MHz $\leq 1.4:1$ 0.4 dB

Physical Specification

Body Material

[Stainless Steel \(303\)](#)

Body Plating

[Passivated](#)

Insulator Material

[PTFE / Teflon](#)

Compliance/Certifications

[ISO 9001 Quality Management](#)

,

[RoHS](#)

Contact Material

[Beryllium Copper](#)

Contact Plating

[Gold](#)

Min. Operating Temperature

-65 °C

Max. Operating Temperature


125 °C

Mating Cycles

> 500

Drawing

Image

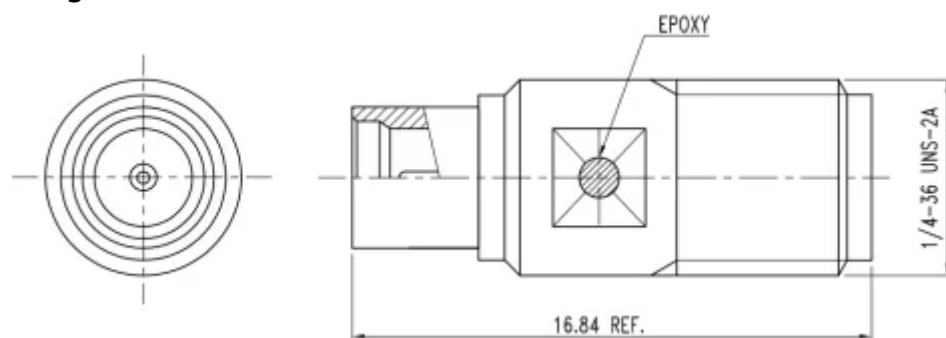

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

