

Page



Powertec Wireless Technology  
ABN: 42 082 948 463  
PO Box 1034, Ashmore City  
Queensland, Australia, 4214  
sales@powertec.com.au  
1300 769 378

## **RF Adapter, SMA Male to SMA Male**

SKU  
ACC-PT-00087  
MPN  
AD-SA1SA1  
Barcode  
9337692002977

### **Description**

The RF Adapter SMA Male to SMA Male (Part Number: AD-SA1SA1) is a high-quality 50  $\Omega$  coaxial adapter from Powertec, an Australian wireless technology manufacturer. Designed for seamless connectivity, this adapter features two SMA Male interfaces with straight bodies and free-hanging mounting, compatible with SMA Female connectors. It operates within a frequency range of 0 GHz to 6 GHz, ensuring reliable performance for various RF applications.

Constructed from Brass with a Gold finish and Beryllium Copper inner contacts with Gold plating, this adapter guarantees excellent durability and conductivity. It functions effectively in a broad temperature range, from -65 °C to 165 °C, making it suitable for demanding environments.

Compliance with ISO 9001 Quality Management and RoHS standards ensures that the AD-SA1SA1 meets stringent quality and environmental guidelines. Ideal for enhancing cellular networks and developing wireless systems, this...

[Read More](#)





## Powertec

Powertec is a wireless technology manufacturer and systems integrator based in Australia. Operating since 1995, Powertec has grown to become the leading wireless technology distributor in its region, and a leading Infratech systems developer. Supporting over 1500 partners the company provides procurement, design, project management, and support services across Australia, New Zealand, Pacific ...

## RF Connector Interface

### RF Interface Body Shape Mounting

<a href="#">SMA Male</a>	<a href="#">Straight</a>	<a href="#">Free Hanging</a>
<a href="#">SMA Male</a>	<a href="#">Straight</a>	<a href="#">Free Hanging</a>

## RF Specification

Start Frequency

0 GHz

Stop Frequency

6 GHz

RF Operating Voltage

$\geq 500$  Vrms

Input Impedance

50  $\Omega$

Inner Contact Resistance

$\leq 1$  m $\Omega$

Insulation Resistance

$\geq 5000$  m $\Omega$

Outer Contact Resistance

$\leq 1 \text{ m}\Omega$

VSWR Measurement

**Frequency VSWR**

6000 MHz  $\leq 1.2:1$

## Physical Specification

Body Material

[Brass](#)

Body Plating

[Gold](#)

Insulator Material

[PTFE / Teflon](#)

Dimensions

21.9 x 8 mm (L x Dia)

Compliance/Certifications

[ISO 9001 Quality Management](#)

,

[RoHS](#)

Contact Material

[Beryllium Copper](#)

Contact Plating

[Gold](#)

Min. Operating Temperature

-65 °C

Max. Operating Temperature


165 °C

Mating Cycles

> 500

Drawing

Image

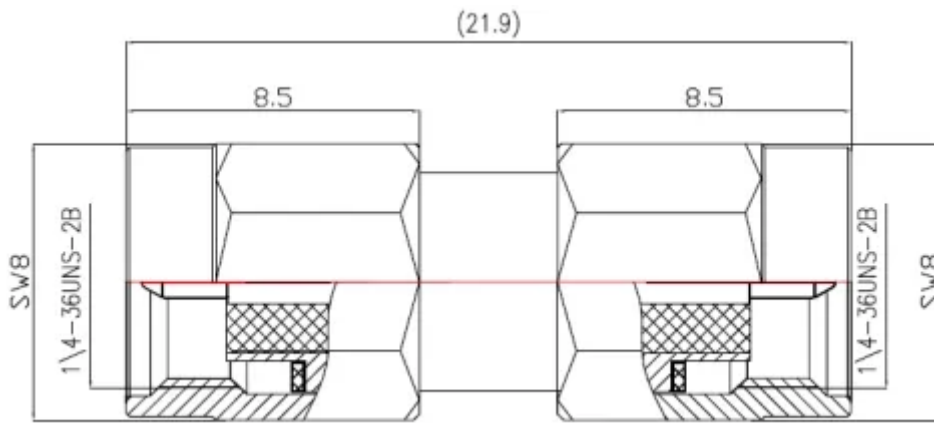

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

