

Powertec Wireless Technology ABN: 42 082 948 463 PO Box 1034, Ashmore City Queensland, Australia, 4214 sales@powertec.com.au 1300 769 378

Huang Liang 2.92 mm Female to N Male Adapter

SKU: ACC-HL-00048 MPN: ADU1-KF1-NM1

Description

The Huang Liang 2.92 mm Female to N Male Adapter (Part Number: ADU1-KF1-NM1) is a high-quality, $50~\Omega$ coaxial RF adapter ideal for various applications, including military, telecommunications, and aerospace. This adapter features a 2.92 mm Female interface and an N Male interface, both with a straight body and free-hanging mounting, compatible with 2.92 mm Male and N Female interfaces, respectively.

Operating within a frequency range of 0 to 18 GHz, the adapter is constructed from passivated stainless steel (303) for durability, with inner contacts made from Beryllium Copper and gold plating to ensure excellent conductivity. It performs reliably in extreme temperatures, from -65 °C to 150 °C.

Compliant with ISO 9001 Quality Management standards and RoHS regulations, this adapter guarantees high precision and reliability. Backed by Huang Liang's over 30 years of experience and expertise in RF technology, it offers top-tier performance for...

Read More





Huang Liang

Huang Liang is a Taiwanese manufacturer of precision coaxial connectors, adapters and cable assemblies. The company provide solutions to different industries including military, telecommunications, and aerospace.

Over 30 years of experience in developing and designing RF products, Huang Liang has overcome many challenges, resulting in unmatched expertise in the field of RF technology. Huang Liang ...

RF Connector Interface

RF Interface	Body Shape	Mounting
2.92 mm Female	Straight	Free Hanging
N Male	Straight	Free Hanging

RF Specification


Start Frequency:	0 GHz	Input Impedance:	50
Stop Frequency:	18 GHz	Inner Contact Resistance:	≤ 6 mΩ
RF Operating Voltage:	≥ 350 Vrms	Insulation Resistance:	≥ 5000 mΩ
		Outer Contact Resistance:	≤ 2 mΩ

VSWR Measurement

Frequency	VSWR	Insertion Loss
18000 MHz	≤ 1.2:1	0.25 dB

Physical Specification

Body Plating: Passivated Contact Plating: Insulator Material: PTFE / Teflon Min. Operating Temp	Cold
Insulator Material: PTFE / Teflon Min. Operating Temp	Gold
	erature: -65 °C
Compliance/Certifications: ISO 9001 Quality Management Max. Operating Temp	erature: 150 °C
RoHS Mating Cycles:	

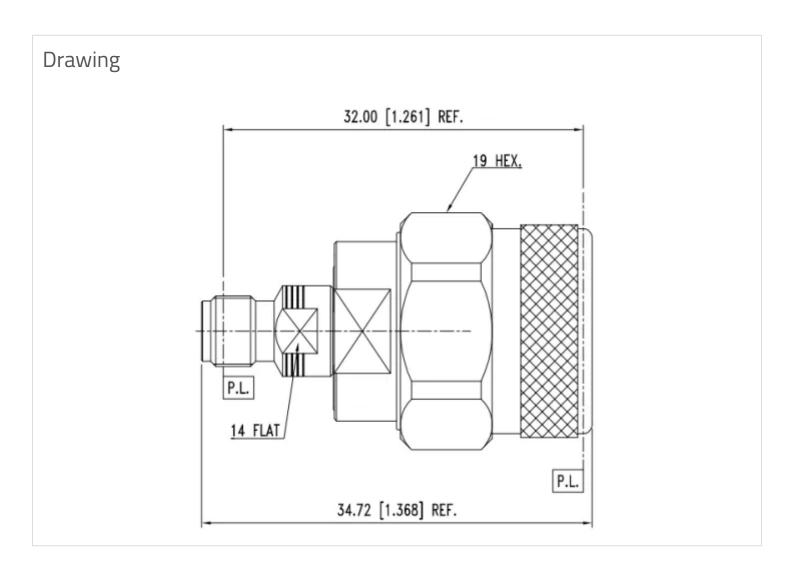

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

