

Page



Powertec Wireless Technology
ABN: 42 082 948 463
PO Box 1034, Ashmore City
Queensland, Australia, 4214
sales@powertec.com.au
1300 769 378

Huang Liang 2.92 mm Male to 3.5 mm Female Adapter

SKU
ACC-HL-00039
MPN
ADU1-KM1-35F1

Description

The Huang Liang 2.92 mm Male to 3.5 mm Female Adapter (Part Number: ADU1-KM1-35F1) is a 50 Ω coaxial RF adapter designed for high performance. It features a 2.92 mm male interface, compatible with 2.92 mm female connections, and a 3.5 mm female interface, compatible with 3.5 mm male and SMA male connections. Both connectors have a straight body shape and free-hanging mounting mechanism.

This adapter operates across a frequency range of 0 to 34 GHz, ensuring broad application suitability. Constructed from durable 303 stainless steel with a passivated finish, it offers robust mechanical strength. The inner contacts are made of beryllium copper with gold plating for superior conductivity.

The adapter performs reliably in extreme temperatures, operating from -65 °C to 150 °C. It adheres to ISO 9001 quality management standards and complies with RoHS regulations, ensuring high-quality and eco-friendly manufacturing.

Huang Liang, a Taiwanese...

[Read More](#)



Huang Liang

Huang Liang is a Taiwanese manufacturer of precision coaxial connectors, adapters and cable assemblies. The company provide solutions to different industries including military, telecommunications, and aerospace.

Over 30 years of experience in developing and designing RF products, Huang Liang has overcome many challenges, resulting in unmatched expertise in the field of RF technology. Huang Liang ...

RF Connector Interface

RF Interface	Body Shape	Mounting
--------------	------------	----------

2.92 mm Male	Straight	Free Hanging
------------------------------	--------------------------	------------------------------

3.5 mm Female	Straight	Free Hanging
-------------------------------	--------------------------	------------------------------

RF Specification

Start Frequency

0 GHz

Stop Frequency

34 GHz

RF Operating Voltage

≥ 350 Vrms

Input Impedance

50 Ω

Inner Contact Resistance

≤ 3 m Ω

Insulation Resistance

$\geq 5000 \text{ m}\Omega$

Outer Contact Resistance

$\leq 2 \text{ m}\Omega$

VSWR Measurement

Frequency VSWR Insertion Loss

34000 MHz $\leq 1.2:1$ 0.25 dB

Physical Specification

Body Material

[Stainless Steel \(303\)](#)

Body Plating

[Passivated](#)

Insulator Material

[PTFE / Teflon](#)

Compliance/Certifications

[ISO 9001 Quality Management](#)

,

[RoHS](#)

Contact Material

[Beryllium Copper](#)

Contact Plating

[Gold](#)

Min. Operating Temperature

-65 °C

Max. Operating Temperature


150 °C

Mating Cycles

> 500

Drawing

Image

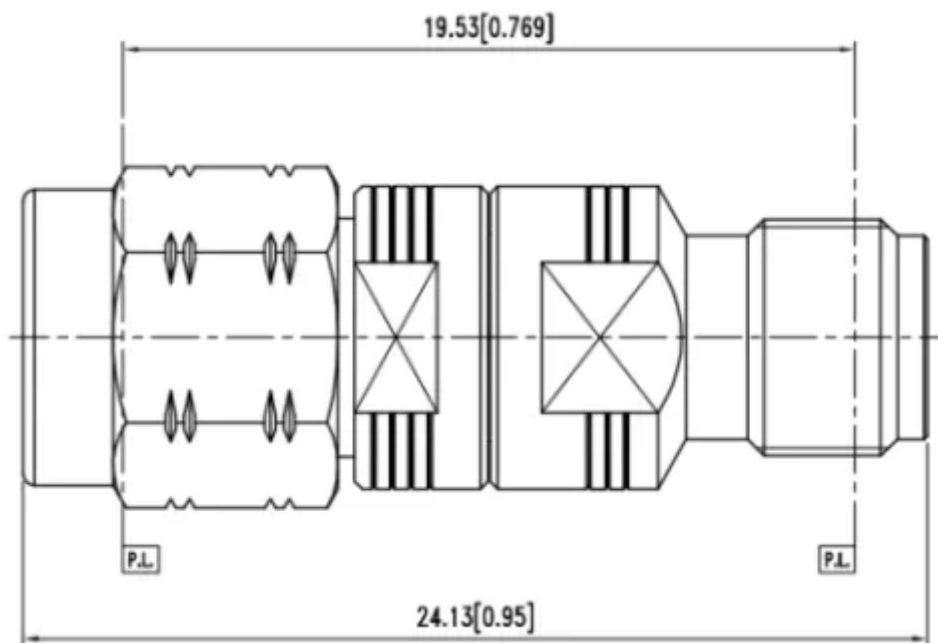

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

