

# Huang Liang 2.92 mm Male to SMA Female Adapter

SKU: ACC-HL-00037

MPN: ADU1-KM1-SMF1

## Description

The Huang Liang 2.92 mm Male to SMA Female Adapter (Part Number: ADU1-KM1-SMF1) is a 50 Ω coaxial RF adapter designed for robust performance. Featuring a 2.92 mm Male interface and a SMA Female interface, both with a straight body and free hanging mounting mechanism, this adapter ensures compatibility with corresponding 2.92 mm Female and SMA Male connectors. It operates efficiently across a wide frequency range from 0 GHz to 26.5 GHz.

Constructed from Stainless Steel (303) with a passivated finish, the adapter delivers durability, while its Beryllium Copper inner contacts with Gold plating ensure excellent conductivity and reliability. It performs reliably in harsh environments with an operating temperature range of -65 °C to 150 °C. This product is manufactured in compliance with ISO 9001 Quality Management standards and is RoHS compliant, reflecting its high quality and safety standards.

Ideal for applications in military...

[Read More](#)

RF Connector Interface



RF Interface	Body Shape	Mounting
2.92 mm Male	Straight	Free Hanging
SMA Female	Straight	Free Hanging

## RF Specification



Huang Liang is a Taiwanese manufacturer of precision coaxial connectors, adapters and cable assemblies. The company provide solutions to different industries including military, telecommunications, and aerospace.

Over 30 years of experience in developing and designing RF products, Huang Liang has overcome many challenges, resulting in unmatched expertise in the field of RF technology. Huang Liang ...

Start Frequency:	0 GHz	Input Impedance:	50
Stop Frequency:	26.5 GHz	Inner Contact Resistance:	$\leq 6 \text{ m}\Omega$
RF Operating Voltage:	$\geq 350 \text{ Vrms}$	Insulation Resistance:	$\geq 5000 \text{ m}\Omega$
		Outer Contact Resistance:	$\leq 2 \text{ m}\Omega$


VSWR Measurement

Frequency	VSWR	Insertion Loss
26500 MHz	$\leq 1.2:1$	0.25 dB

## Physical Specification

Body Material:	Stainless Steel (303)	Contact Material:	Beryllium Copper
Body Plating:	Passivated	Contact Plating:	Gold
Insulator Material:	PTFE / Teflon	Min. Operating Temperature:	-65 °C
Compliance/Certifications:	ISO 9001 Quality Management	Max. Operating Temperature:	150 °C
RoHS		Mating Cycles:	> 500

## Drawing

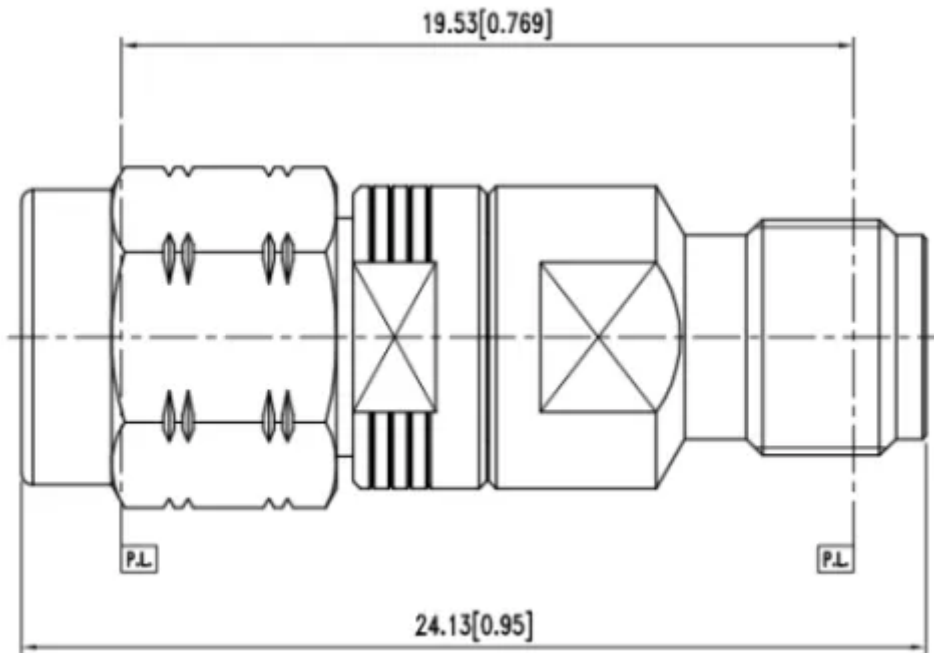

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

