

Huang Liang 2.4 mm Female to 2.92 mm Female Adapter

SKU: ACC-HL-00034
 MPN: ADU1-QF1-KF1

Description

The Huang Liang ADU1-QF1-KF1 Adapter is a high-quality 50 Ω coaxial RF adapter with a 2.4 mm Female to 2.92 mm Female interface. This adapter supports frequencies from 0 GHz to 40 GHz and is compatible with 2.4 mm Male, 1.85 mm Male, and 2.92 mm Male interfaces. It features a straight, free-hanging body made of durable Stainless Steel (303) with a Passivated finish. The inner contacts are crafted from Beryllium Copper and Gold-plated, ensuring optimal connectivity.

Designed for robust performance, this adapter operates efficiently in temperatures ranging from -55 °C to 125 °C. It meets ISO 9001 Quality Management standards and complies with RoHS regulations.


Huang Liang, based in Taiwan, specialises in precision coaxial connectors, adapters, and cable assemblies, serving industries like military, telecommunications, and aerospace. With over 30 years of experience, Huang Liang is known for its expertise in RF technology and its...

[Read More](#)

[RF Connector Interface](#)



RF Interface	Body Shape	Mounting
2.4 mm Female	Straight	Free Hanging
2.92 mm Female	Straight	Free Hanging



Huang Liang
TECHNOLOGIES CO., LTD.

Huang Liang is a Taiwanese manufacturer of precision coaxial connectors, adapters and cable assemblies. The company provide solutions to different industries including military, telecommunications, and aerospace.

Over 30 years of experience in developing and designing RF products, Huang Liang has overcome many challenges, resulting in unmatched expertise in the field of RF technology. Huang Liang ...

RF Specification

Start Frequency:	0 GHz	Input Impedance:	50
Stop Frequency:	40 GHz	Inner Contact Resistance:	$\leq 3 \text{ m}\Omega$
RF Operating Voltage:	$\geq 325 \text{ Vrms}$	Insulation Resistance:	$\geq 5000 \text{ m}\Omega$
		Outer Contact Resistance:	$\leq 3 \text{ m}\Omega$


VSWR Measurement

Frequency	VSWR	Insertion Loss
40000 MHz	$\leq 1.2:1$	0.25 dB

Physical Specification

Body Material:	Stainless Steel (303)	Contact Material:	Beryllium Copper
Body Plating:	Passivated	Contact Plating:	Gold
Insulator Material:	PTFE / Teflon	Min. Operating Temperature:	-55 °C
Compliance/Certifications:	ISO 9001 Quality Management	Max. Operating Temperature:	125 °C
RoHS		Mating Cycles:	> 500

Drawing

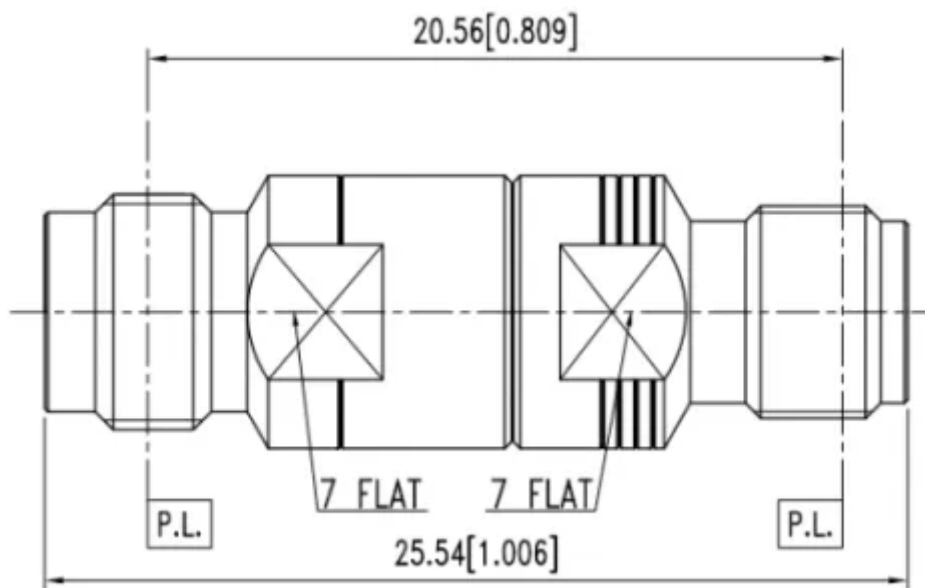

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

