

Page



Powertec Wireless Technology  
ABN: 42 082 948 463  
PO Box 1034, Ashmore City  
Queensland, Australia, 4214  
sales@powertec.com.au  
1300 769 378

# **Telegartner N Straight Plug Crimp G30 (1.5/3.8); G54 (1.5/3.8 FLEX) crimp/crimp**

SKU  
ACC-TG-00021  
MPN  
100023915

## Description

The Telegärtner N Straight Plug Crimp G30 (1.5/3.8); G54 (1.5/3.8 FLEX) is a high-performance coaxial RF connector designed specifically for telecommunications and data communication applications. This N Male connector features a straight body shape and is suitable for free-hanging mounting, making it ideal for a variety of RF applications where reliable signal transmission is critical. It is optimised for use with L-240 cable types and employs a crimp attachment mechanism, ensuring secure and efficient cable connections.

Constructed with a brass body and nickel plating, the connector provides robust durability and resistance to environmental factors. Its inner contacts are made from phosphor bronze with a copper-silver alloy plating, enhancing conductivity and signal integrity. The PTFE/Teflon insulator allows for stable performance across a wide temperature range of -40°C to 85°C. With the capability to endure over 500 mating cycles...

[Read More](#)





## Telegärtner

As family-owned company the Telegärtner Group has developed to an international network of affiliated companies specialising in intermediate and end products for telecommunications and data communications for customers with the most exacting demands for high-tech applications over the last 70 years.

Since the company was set up in 1945 Telegärtner has seen steady growth and has continually expanded ...

## **RF Connector Interface**

**RF Interface** **Body Shape** **Mounting**

[N Male](#)

[Straight](#)

[Free Hanging](#)

## **RF Specification**

## **Physical Specification**

Cable Group

[L-240](#)

Body Material

[Brass](#)

Body Plating

[Nickel](#)

Insulator Material

[PTFE / Teflon](#)

Dimensions

34.2 x 19 x 20.8

Weight

28.92 g

Compliance/Certifications

[RoHS](#)

Conductor Attachment

[Cable, Crimp](#)

Contact Material

[Phosphor Bronze](#)

Contact Plating

[Copper-Silver Alloy \(Cu2Ag5 / Cu2Ag3\)](#)

Min. Operating Temperature

-40 °C


Max. Operating Temperature

85 °C

Mating Cycles

> 500

Drawing

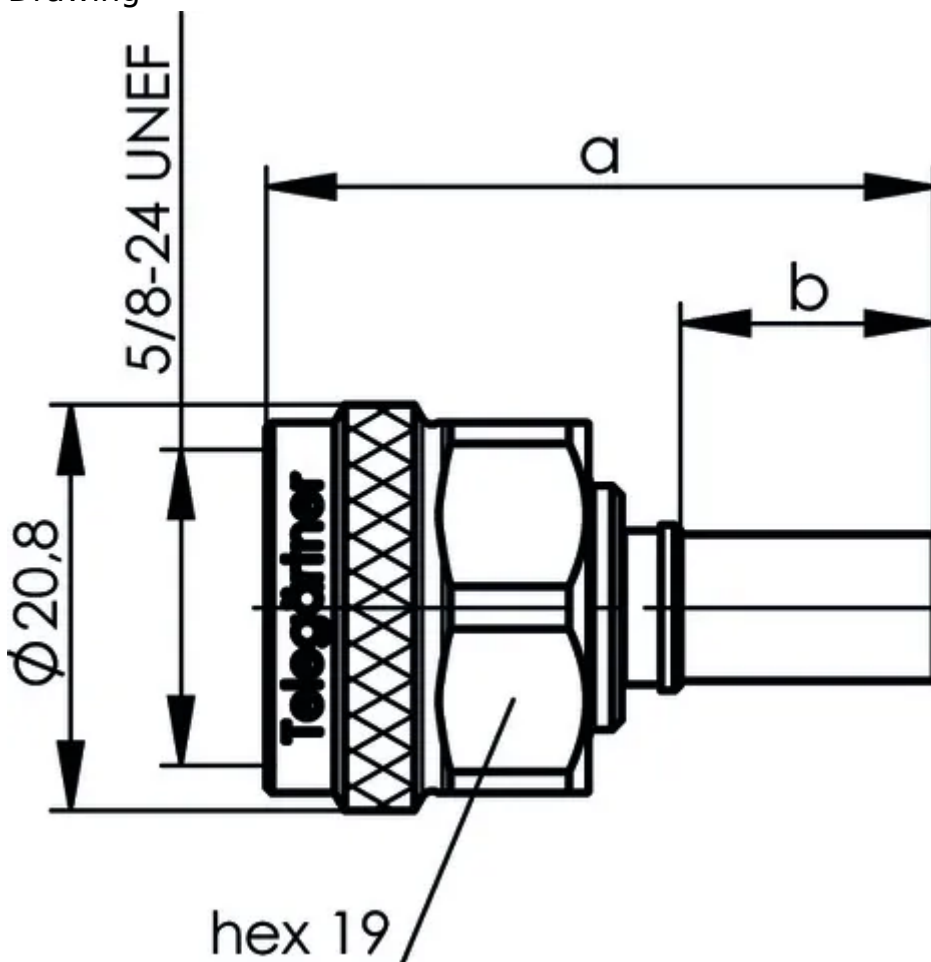

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility

therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

