

Powertec Wireless Technology ABN: 42 082 948 463 PO Box 1034, Ashmore City Queensland, Australia, 4214 sales@powertec.com.au 1300 769 378

Telegartner N Straight Plug Crimp RG-213/U crimp/crimp

SKU: ACC-TG-00031 MPN: 100023905

Description

The Telegärtner N Straight Plug Crimp (SKU: ACC-TG-00031) is a high-quality RF connector designed for use with RG-213 cables. Featuring a N Male connector with a straight body and free-hanging mounting style, it ensures reliable connectivity for demanding applications. This connector uses a crimp/crimp attachment mechanism for secure cable connection.

Constructed from a lead-brass alloy with a copper-silver alloy plating, both the body and inner contacts offer excellent durability and corrosion resistance. The PTFE (Teflon) electrical insulator provides robust performance in various environments.

Telegärtner's N Straight Plug supports multiple mating cycles and operates efficiently within a wide temperature range. It is engineered to cater to high-tech telecommunications and data communications applications, ensuring top-grade performance.

Telegärtner, a renowned German brand, has been at the forefront of providing innovative solutions in...

Read More





Telegärtner

As family-owned company the Telegärtner Group has developed to an international network of affiliated companies specialising in intermediate and end products for telecommunications and data communications for customers with the most exacting demands for high-tech applications over the last 70 years.

Since the company was set up in 1945 Telegärtner has seen steady growth and has continually expanded ...


RF Connector Interface

| RF Interface | Body Shape | Mounting |
|--------------|------------|--------------|
| N Male | Straight | Free Hanging |

RF Specification

Physical Specification

| Cable Group: | RG-213 | Conductor Attachment: | Cable, Crimp |
|---------------------|--|-----------------------|--|
| Body Material: | Lead-Brass Alloy (CuZn39Pb3) | Contact Material: | Lead-Brass Alloy (CuZn39Pb3) |
| Body Plating: | Copper-Silver Alloy (Cu2Ag5 / Cu2Ag3) | Contact Plating: | Copper-Silver Alloy (Cu2Ag5 / Cu2Ag3) |
| Insulator Material: | PTFE / Teflon | | |
| Dimensions: | 36.6 x 20.8 | | |
| | | | |

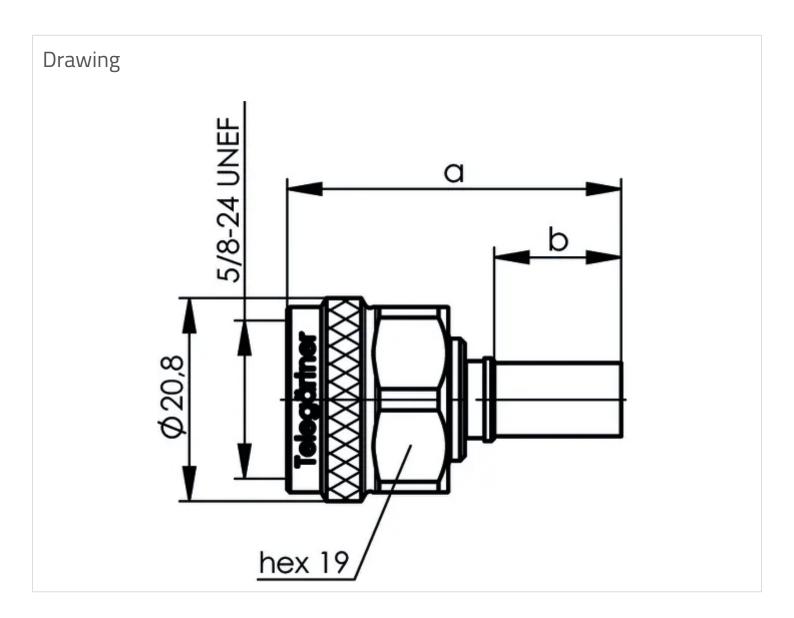

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

