

Page



Powertec Wireless Technology
ABN: 42 082 948 463
PO Box 1034, Ashmore City
Queensland, Australia, 4214
sales@powertec.com.au
1300 769 378

2J Falcon 4G-5G WiFi Ultraband MIMO + GNSS Adhesive Antenna, 617 to 5925 MHz

SKU
ANT-2J-00013
MPN
2J6084PGFA

Description

The 2J Falcon 4G-5G WiFi Ultraband MIMO + GNSS Adhesive Antenna (ANT-2J-00013) is a versatile solution designed for high-performance connectivity across a broad frequency range of 617 to 5925 MHz. This adhesive patch antenna integrates seamlessly into automotive, M2M, base station, and embedded systems, offering reliable multi-band support essential for modern telecommunication applications.

Key features include a robust 2x2 MIMO configuration with three RF connections, ensuring optimal data throughput and signal reliability. It operates efficiently in challenging environments, with a temperature range from -40 °C to 85 °C. The antenna's GNSS functionality, enhanced by an integrated LNA, provides precise navigation support, making it ideal for applications requiring accurate location tracking.

The Falcon antenna is RoHS compliant, ensuring adherence to environmental standards. Its compact dimensions (80 x 76 x 16 mm) and adhesive mounting...

[Read More](#)





[2J](#)

2J is a worldwide supplier of antenna solutions for Automotive, Marine, Telematic, Automation and M2M markets. 2J utilise a plethora of modern engineering tools, from network analysers and anechoic chambers, to simulation software and 3D printers. These tools help reduce design phases, and enable us to react to customers' needs promptly and efficiently.

Over the past decade, 2J has established ...

RF Specification

Cable 1: 5GNR

Start Frequency

617 MHz

Stop Frequency

5925 MHz

Max. Input Power

25 W

Polarisation

[Linear](#)

Input Impedance

50 Ω

RF Connectors

Ports	RF Interface	Body Shape	Cable Series	Length
-------	--------------	------------	--------------	--------

1	SMA Male	Straight	L-100	3000 mm
---	--------------------------	--------------------------	-----------------------	---------

Frequency Test Data

Start Freq.	Stop Freq.	Peak Gain	Return Loss	VSWR	Azimuth	Avg. Gain	Efficiency
617 MHz	960 MHz	2.4 dBi	> 6.9 dB	< 3.4:1	360°	-3.9 dBi	43%
1427 MHz	2690 MHz	4.4 dBi	> 13.5 dB	< 1.7:1		-2.3 dBi	59%
3300 MHz	5000 MHz	2 dBi	> 9.1 dB	< 2.3:1	360°	-4.3 dBi	38%
5150 MHz	5925 MHz	1.1 dBi	> 7.2 dB	< 2.6:1	360°	-5 dBi	32%

Cable 2: 5GNR

Start Frequency

617 MHz

Stop Frequency

5925 MHz

Max. Input Power

25 W

Polarisation

[Linear](#)

Input Impedance

50 Ω

RF Connectors

Ports RF Interface Body Shape Cable Series Length

1 [SMA Male](#) [Straight](#) [L-100](#) 3000 mm

Frequency Test Data

Start Freq.	Stop Freq.	Peak Gain	Return Loss	VSWR	Azimuth	Avg. Gain	Efficiency
617 MHz	960 MHz	1.9 dBi	> 6.1 dB	< 3.5:1		-3.7 dBi	44%
1427 MHz	2690 MHz	4.7 dBi	> 15.5 dB	< 1.6:1		-2 dBi	64%
3300 MHz	5000 MHz	1.9 dBi	> 9.2 dB	< 2.3:1	360°	-4.4 dBi	37%
5150 MHz	5925 MHz	1.4 dBi	> 8 dB	< 2.3:1	360°	-5.1 dBi	31%

Cable 3: GNSS

Start Frequency

1575.42 MHz

Stop Frequency

1606 MHz

Input Impedance

50 Ω

Polarisation

[Right Hand Circular \(RHCP\)](#)

Low Noise Amplifier (LNA)

LNA Gain

28 dBic

Noise Figure

≤ 1.5 dB

Power Consumption

< 24.3 mW

Min. Operating Voltage

1.5 V

Max. Operating Voltage

3.6 V

RF Connectors

Ports	RF Interface	Body Shape	Cable Series	Length
-------	--------------	------------	--------------	--------

1	SMA Male	Straight	L-100	3000 mm
---	--------------------------	--------------------------	-----------------------	---------

Physical Specification

Subtype

[Adhesive Patch](#)

Input Ports

3

MIMO

[2x2 MIMO](#)

Min. Operating Temperature

-40 °C

Max. Operating Temperature

85 °C

Dimensions

80 x 76 x 16

Materials

[ABS Plastic](#)


Mounting

[Adhesive](#)

Compliance/Certifications

RoHS

Drawing

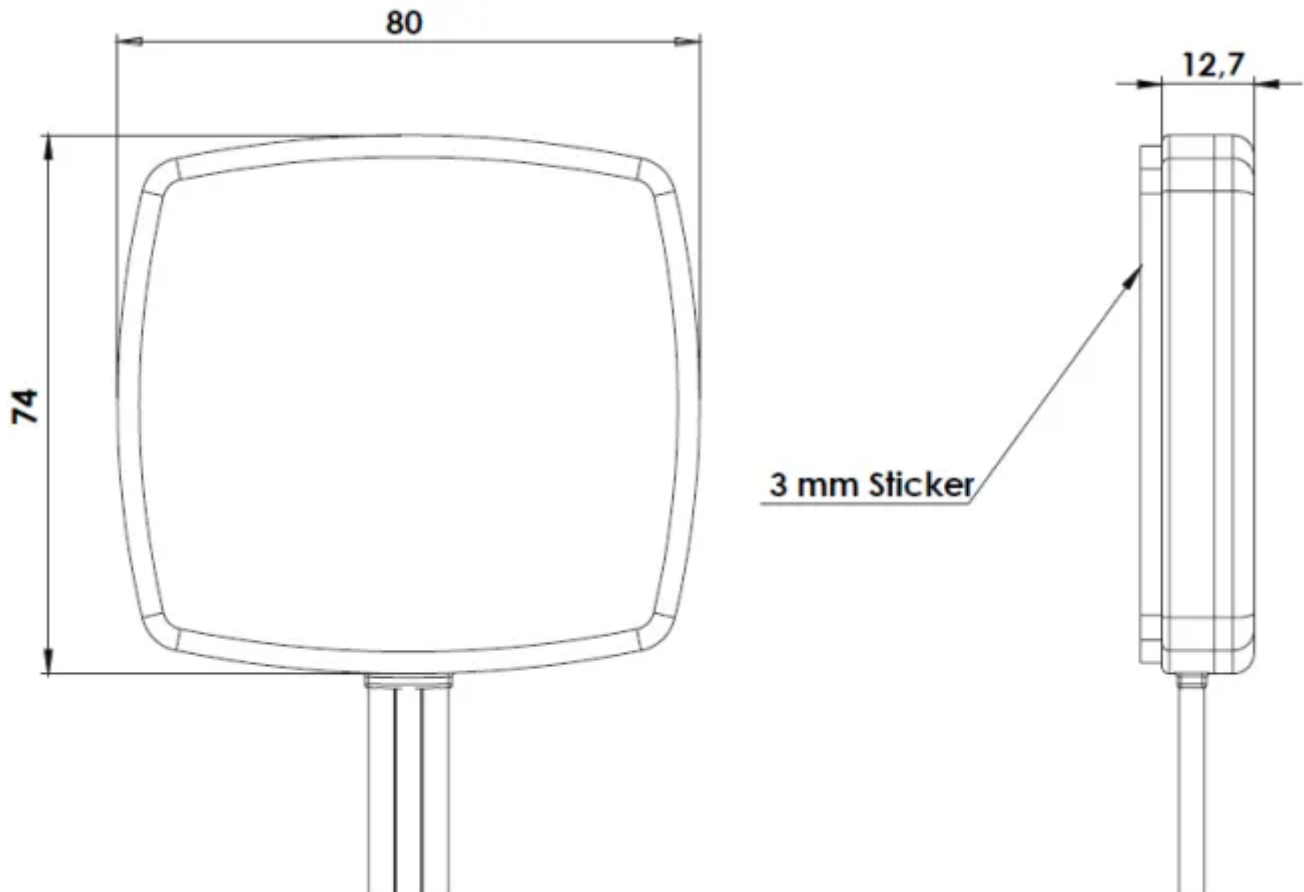

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

