

# ComAnt Offset Pattern Collinear Antenna, 440 to 475 MHz, 8dBi, N Female

SKU: ANT-CA-00006

MPN: CA450C2


## Description

The ComAnt Offset Pattern Collinear Antenna (SKU: ANT-CA-00006) from CompleTech is designed for professional communication applications within the 440 to 475 MHz frequency range. With a peak gain of 8dBi and a VSWR of  $<1.5:1$ , it ensures reliable signal performance for UHF applications. Featuring a single N Female RF connection, it integrates seamlessly into existing systems.

Constructed from durable ABS plastic, aluminium, and beryllium copper, this antenna is built to withstand challenging environments, certified with an IP67 rating for dust and water resistance. It operates efficiently in temperatures ranging from  $-40\text{ }^{\circ}\text{C}$  to  $80\text{ }^{\circ}\text{C}$ , making it suitable for diverse outdoor installations.

The antenna's vertical polarisation and wide azimuth beamwidth of  $181^{\circ}$  provide excellent coverage in various settings. Its modular design allows easy adaptation across different applications, ensuring flexibility for changing needs. CompleTech, a renowned...

[Read More](#)

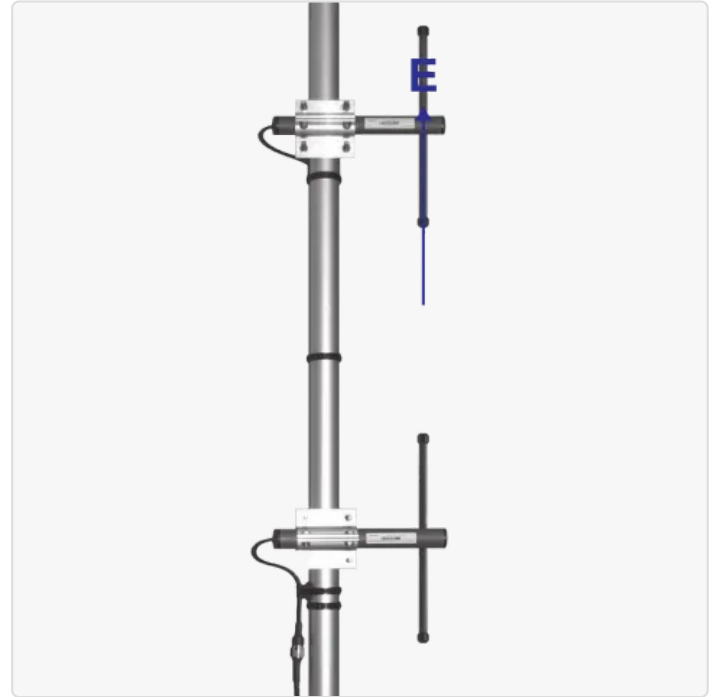

## CompleTech



CompleTech is a Finnish-owned company group specialising in the design, manufacturing and marketing of high quality ComAnt® communications antennas for professionals since 1990.

Radome enclosed IP67 proof ComAnt® antennas are in serial production covering all the main VHF-, UHF- and SHF-bands with different radiation patterns, polarizations and gains. The modularity principle makes it easy to turn ...

# RF Specification

## Collinear Antenna

|                  |         |                  |              |
|------------------|---------|------------------|--------------|
| Start Frequency: | 440 MHz | Polarisation:    | Vertical (V) |
| Stop Frequency:  | 475 MHz | Input Impedance: | 50           |

## RF Connectors

| Ports | RF Interface | Body Shape |
|-------|--------------|------------|
| 1     | N Female     | Straight   |

## Frequency Test Data

| Start Freq. | Stop Freq. | Peak Gain | VSWR    | Azimuth | Elevation |
|-------------|------------|-----------|---------|---------|-----------|
| 440 MHz     | 475 MHz    | 8 dBi     | < 1.5:1 | 181°    | 27°       |

# Physical Specification

|                             |           |                            |   |
|-----------------------------|-----------|----------------------------|---|
| Subtype:                    | Collinear | Dimensions:                | 985   |
| Input Ports:                | 1         | Ingress Protection:        | IP67  |
| MIMO:                       | 1x1 SISO  | Materials:                 | ABS Plastic, Aluminium,<br>Beryllium Copper |
| Min. Operating Temperature: | -40 °C    | Mounting:                  | Pole Clamp 35 to 60 mm                      |
| Max. Operating Temperature: | 80 °C     | Weight:                    | 1.59 kg                                     |
|                             |           | Compliance/Certifications: | RoHS  |

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

