


FREQUENCY INDEPENDENT DATA

Description:	omnidirectional coaxial dipole
Frequency:	326-353 MHz, 336-364MHz, 380-400 MHz, 405-440 MHz, 440-475 MHz, 830-890 MHz, 880-960 MHz
Impedance:	50 ohm
Gain:	2 dBi
H -3 dB:	
E -3 dB:	81°
F/B:	0 dB
Polarization:	vertical
Connector:	N-/ TNC-/ 7/16-female
VSWR:	< 1.5
Radome:	UV resistant ABS/FG, RAL 7012, PU foam filling
Radiator:	copper
Attachment:	Ø 35-60 mm, aluminium alloy bracket, stainless steel V-bolts and self-locking nuts
Lightning protection:	DC-short circuited
Temperature:	-40°C - +80°C
IP:	67

- combination of durability, light weight and low wind load
- radome enclosed radiator
- IP67 proof construction
- all electromechanics moulded inside of closed cell PU foam
- DC shorted feed point
- integrated impedance compensation
- integrated RF choke

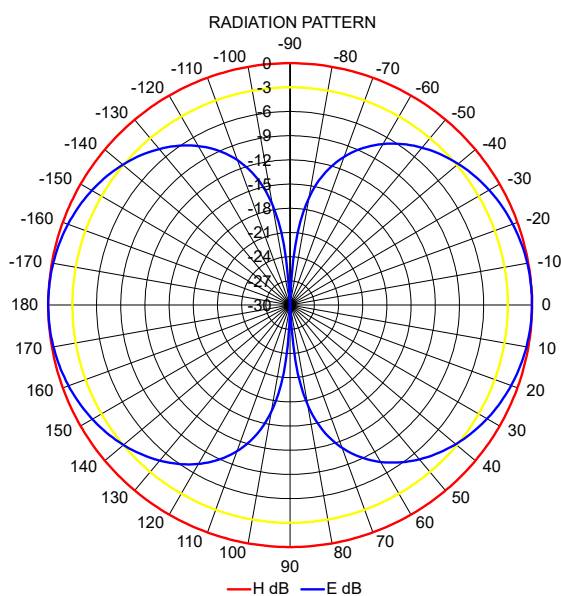

HCM 000ND00 041DE00



RoHS
COMPLIANT

CompleTech
ComAnt[®] -antennas by CompleTech, Finland

CAO OMNIDIRECTIONAL COAXIAL DIPOLE