

0.81 mm Cable Assembly, MHF4 to SMA Female Bulkhead, 12cm

SKU: ACC-PT-00329
 MPN: CA081-MH4SA2BRM.012
 Barcode: 9337692003608

Description

0.81 mm Mini-Coax cable assemblies are used inside electronics to interface a surface mount MHF4 RF connector located on a wireless chipset to an externally mounted connector typically mounted on the side of the user device.

This cable assembly is used to provide an external SMA Female connector from a device with a MHF4 connector mounted on its PCB. Typically this is to allow the connection of an external antenna or attachment of an antenna feeder cable that uses an SMA Male connector.


[Read More](#)

These cable assemblies are stocked locally and supplied individually packaged for use in electronics prototyping, as replacements, or critical spares. MHF4 connectors are generally found on M.2 chipsets.

[Read More](#)



RF Specification

Start Frequency:	0 GHz	Stop Frequency:	6 GHz
			
Frequency	3000 MHz	VSWR	≤ 1.3:1
Frequency	6000 MHz	VSWR	≤ 1.5:1

Physical Specification

Subtype:	Patch Cable	Length:	0.12 m
Mating Cycles:	> 50		
Compliance/Certifications:	ISO 9001 Quality Management		
RoHS			

RF Connectors

RF Interface

MHF4 Female

SMA Female

Body Shape

Right Angle


Straight

Mounting

Free Hanging

Bulkhead

Drawing

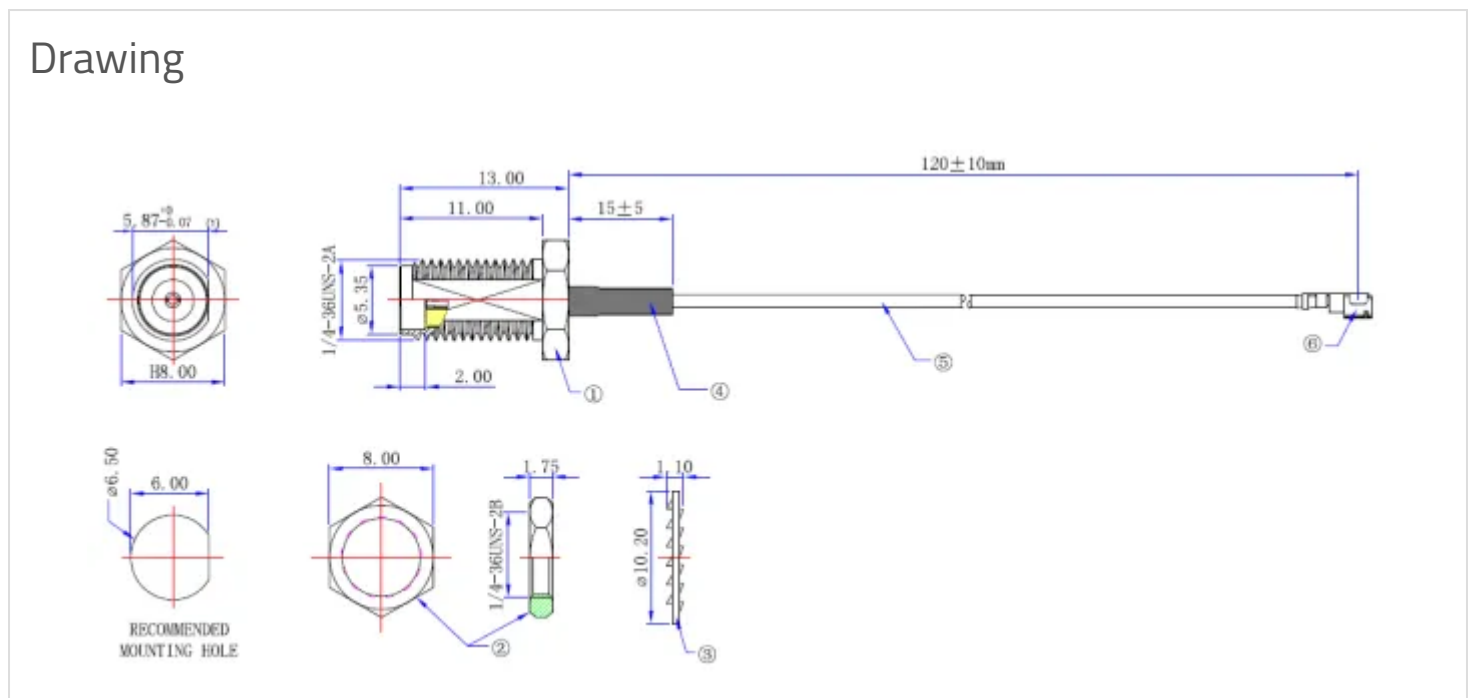

0.81 mm Mini-Coax

Min. Frequency: 0 GHz Max. Frequency: 6 GHz

Impedance: 50 Colour: Black

Min. Bend Radius Static: 3 mm

Attenuation @ 1 GHz: 2.65 dB/m

Cable Layers

Layer	Diameter	Materials	Notes
Inner Conductor	0.15 mm	Silver Plated Copper (SC)	7x0.05 mm Strand
Dielectric	0.40 mm	Fluorinated Ethylene Propylene (FEP)	
Outer Conductor	0.65 mm	Silver Plated Copper Braid	
Outer Jacket	0.81 mm	Fluorinated Ethylene Propylene (FEP)	

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

