

# Powertec RF Termination Load, 5 W, DC to 3800 MHz, 4.3-10 Male

SKU: IBC-PT-00034  
 MPN: PCM-TL5-6938.432  
 Barcode: 9337692001710

## Description

The Powertec RF Termination Load, Model PCM-TL5-6938.432, is designed for optimal performance in RF passive applications. This 5 W load operates effectively across a frequency range from 698 MHz to 3800 MHz, making it suitable for a wide variety of wireless technologies. Featuring a 4.3-10 Male connector, it offers reliable connectivity with an input impedance of 50 Ω. The product's 3rd Order PIM rating of -155 dBc ensures minimal passive intermodulation, crucial for maintaining signal integrity in high-performance systems.

Measuring 181 mm in length and 50 mm in diameter, the termination load is compact yet robust, with an IP65 ingress protection rating, providing excellent resistance against dust and water. It operates efficiently within a temperature range of -25 °C to 50 °C, suitable for diverse environmental conditions. The load maintains a VSWR of less than 1.3:1 across its operating frequencies, ensuring minimal signal reflection...

[Read More](#)



## RF Specification

Min. Frequency:	698 MHz	Input Impedance:	50
Max. Frequency:	3800 MHz	Max. Input Power:	5 W
		PIM, 3rd Order:	-155 dBc

Frequency Test Data

Start Frequency

698 MHz

Stop Frequency

3800 MHz


VSWR

< 1.25:1

## Physical Specification

Input Ports:	1	Min. Operating Temperature:	-25 °C
Output Ports:	1	Max. Operating Temperature:	50 °C
Subtype:	Terminator / Load	Compliance/Certifications:	RoHS
Ingress Protection:	IP65		
Dimensions:	181x50		
Weight:	0.7 kg		

### Drawing

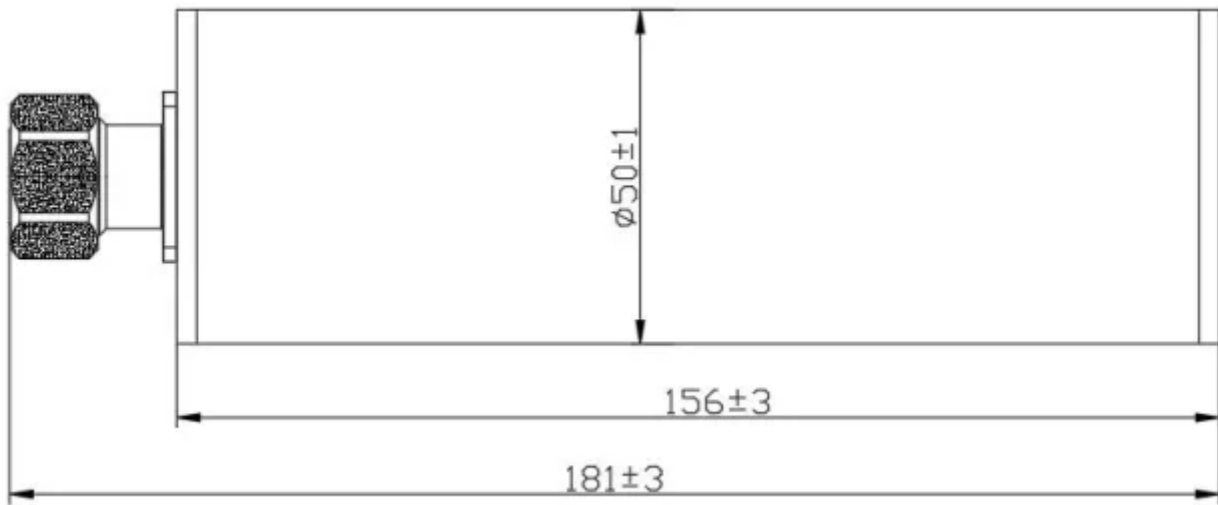

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

