

RF Adapter, N Male to TNC Female

SKU: ACC-PT-00099

MPN: AD-N1TN2

Description

The RF Adapter, N Male to TNC Female (SKU: ACC-PT-00099) by Powertec is a high-performance component designed for versatile RF applications. Constructed with a robust brass body and nickel plating, it features gold-plated brass contacts and a PTFE insulator, ensuring durability and reliable performance. This adapter supports over 500 mating cycles and operates efficiently across a wide temperature range from -65 °C to 165 °C.

Engineered for a frequency range of 0 to 6 GHz, the adapter maintains an input impedance of 50 Ω and exhibits a VSWR of $\leq 1.25:1$ at 6000 MHz, ensuring minimal signal reflection and optimal performance. It is compliant with rigorous MIL-STD-202 standards for thermal shock, corrosion, vibration, shock, and moisture resistance, guaranteeing reliability in demanding environments.

The adapter features one N Male connector and one TNC Female connector, both with straight body shapes and free-hanging mounting styles, making...

[Read More](#)



RF Connector Interface

RF Interface	Body Shape	Mounting
N Male	Straight	Free Hanging
TNC Female	Straight	Free Hanging

RF Specification

Start Frequency:	0 GHz	Input Impedance:	50
Stop Frequency:	6 GHz		


VSWR Measurement

Frequency	VSWR
6000 MHz	$\leq 1.25:1$

Physical Specification

Body Material:	Brass	Contact Material:	Brass
Body Plating:	Nickel	Contact Plating:	Gold
Insulator Material:	PTFE / Teflon	Min. Operating Temperature:	-65 °C
Dimensions:	34.0 x 19.0	Max. Operating Temperature:	165 °C
		Mating Cycles:	> 500
		Mechanical Compliance:	MIL-STD-202: Thermal Shock
			,
		MIL-STD-202: Corrosion	,
		MIL-STD-202: Vibration	,
		MIL-STD-202: Shock	,
		MIL-STD-202: Moisture Resistance	

Drawing

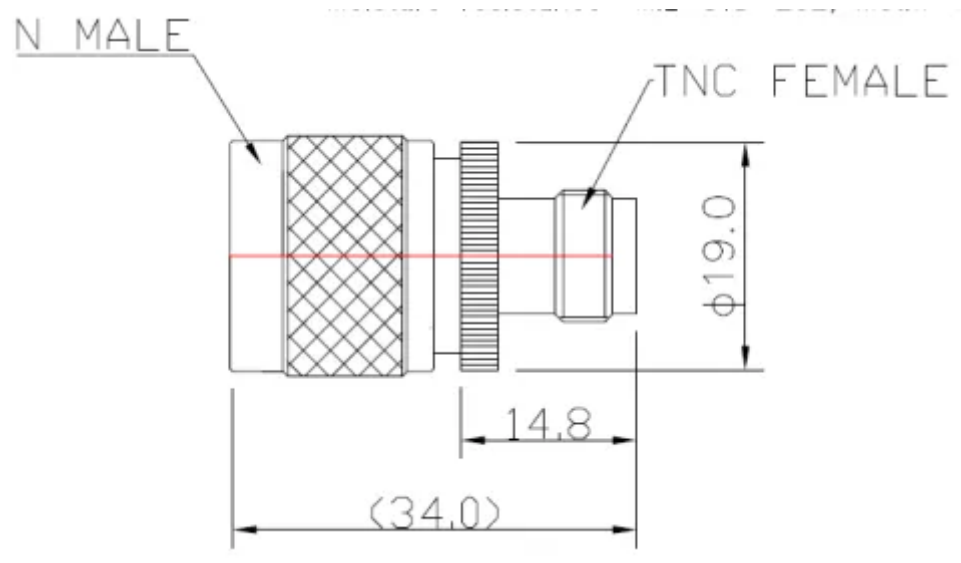

Disclaimer: Although care has been taken to ensure the accuracy, completeness and reliability of the information provided, Powertec assumes no responsibility therefore. The user of the information agrees that the information is subject to change without notice. Powertec assumes no responsibility for the consequences of use of such information, nor for any infringement of third party intellectual property rights which may result from its use. IN NO EVENT SHALL POWERTEC BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, OR INCIDENTAL DAMAGE RESULTING FROM, ARISING OUT OF OR IN CONNECTION WITH THE USE OF THE INFORMATION.

